


SALICE
ONLY MADE IN **ITALY**



HINGES

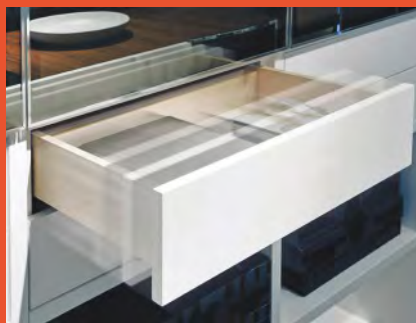

DRAWER SLIDES



LIFT SYSTEMS

Introduction

Salice is one of the most valued brands among the small, medium-sized and large companies in the furniture industry. This **world famous Italian brand** owns patents for furniture hinges and opening systems, many of which are recognised as real innovations in the industry.

Silentia, the technically revolutionary hinge, with its decelerated closing system, is hidden from view and combined with the hinge components. **Lift Systems**, created to offer alternative ways to open wall unit doors, giving greater design flexibility whilst offering better **convenience**. It incorporates the exclusive **Smove** decelerating system. **Futura Slides**, the concealed runner, is suitable for all drawer opening applications, with **Push** opening in handle-less furniture and **Smove** decelerated closing. It has a built-in fascia attachment system.



View of the Salice Factory in Italy.

Besides being subjected to stringent in-plant tests, Salice products are tested by independent bodies to verify their conformity with strict quality criteria, strength and durability, according to standards appropriate to the certification body and the country: LGA, Germany CTBA, France LAW, United States FIRA, United Kingdom.


Salice products have the ability to provide real solutions who need to confer quality on their products by means of completeness in range, functionality and style. The best choice for your kitchens.



HINGES



Patented Mechanisms:



DRAWER SLIDES



Patented Mechanisms:




LIFT SYSTEMS




Bright nickel plated steel cup and arm.



Dimensions of the Ø 35 mm cup.



Approx. number of hinges required according to the door dimension and weight.

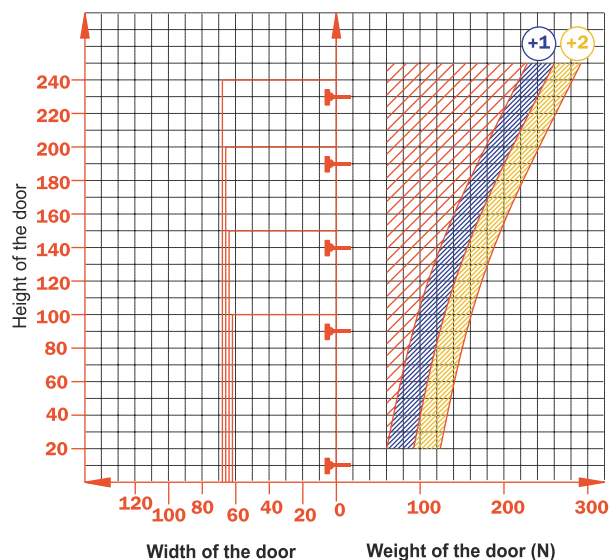

Adjustments

Side adjustment from -1,5 mm to +4 mm
Height adjustment ± 2 mm
Depth adjustment +2,5 mm

SALICE
ONLY MADE IN ITALY



Hardware Solutions



Lapis

Revolutionizes shape and perception

Lapis is the new system for Silentia Hinges with damping system integrated in the cup with cover. At present hinges are available with 0mm and 9mm cranking for doors with 16 mm min. thickness, with 13.5 deep cup, 110° opening and door drilling pattern "K" from 3 to 6mm. Lapis Hinge system only works in combination with longitudinal Domi snap-on mounting plates (BAP). The application of the new hinge requires the same standard drilling patterns and processes used in traditional furniture hinges and it does not need special workings on door and cabinet side. Lapis is a hinge system which offers industry- leading characteristics of adjustment, strength, durability and damping performance. The product technique consists of two covers which move with the hinge elements synchronously, hiding the technical components and enriching the product with refined aesthetics, far removed from the traditional geometries of furniture hinges. The 3 finishes – Satin Metal Black, Dull White and Glossy Chrome – offer a high personalization level, meeting the requirements of producers of any kind of furniture. Lapis by Salice represents a revolution in form and style and its numerous finishes compared to what is available on the market.

ITEM	ITEM CODE	FINISH
Lapis Hinge – Overlay	S7-LH 1	Plated
Lapis Hinge - Half Overlay	S7-LH 2	Plated
Lapis Arm Cover - Overlay	S7-LAC1 SB	Satin Metal Black
	S7-LAC1 DW	Dull White
	S7-LAC1 GC	Glossy Chrome
Lapis Arm Cover - Half Overlay	S7-LAC2 SB	Satin Metal Black
	S7-LAC2 DW	Dull White
	S7-LAC2 GC	Glossy Chrome
Lapis - Cap Cover	S7-LCC SB	Satin Metal Black
	S7-LCC DW	Dull White
	S7-LCC GC	Glossy Chrome



Satin Metal Black



Dull White



Glossy Chrome

SALICE
ONLY MADE IN ITALY



Hardware Solutions


Slide on Hinge



Overlay
S9-HS1

Special Features

- It can be used for shutter thickness from 16mm to 26mm.
- Bright nickel plated steel cup and arm.
- 110° opening in overlay and half overlay models and 94° opening in inset model.
- Drilling distance on the door $K=4\text{mm}$.
- Mounting Plate provided S-MP1-3.

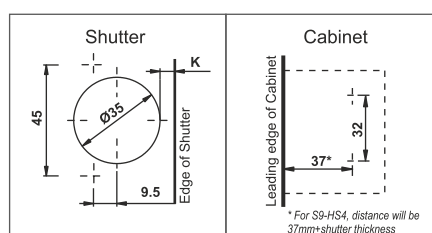

ITEM	ITEM CODE	SIZE (mm)	FINISH
Slide on Hinge 110° - Overlay With Mounting plate 1 (S-MP1-3)	S9-HS1	0	Plated
Slide on Hinge 110° - Half Overlay With Mounting plate 1 (S-MP1-3)	S9-HS3	9	Plated
Slide on Hinge 94° - Inset With Mounting plate 1 (S-MP1-3)	S9-HS4	17	Plated


Click on Hinge



Overlay
S8-HC1

Special Features

- It can be used for shutter thickness from 16mm to 26mm.
- Bright nickel plated steel cup and arm.
- 11 mm deep metal cup
- 110° opening.
- Drilling distance on the door $K = 4\text{mm}$
- Mounting Plate provided S-MP1-3.

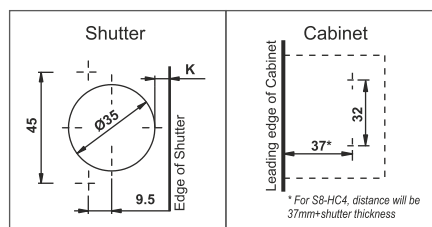

ITEM	ITEM CODE	SIZE (mm)	FINISH
Click on Hinge 110° - Overlay With Mounting plate 1 (S-MP1-3)	S8-HC1	0	Plated
Click on Hinge 110° - Half Overlay With Mounting plate 1 (S-MP1-3)	S8-HC3	9	Plated
Click on Hinge 110° - Inset With Mounting plate 1 (S-MP1-3)	S8-HC4	17	Plated

SALICE
ONLY MADE IN ITALY



Hardware Solutions


Click on Special 110° Hinge



Overlay
S2-HSP1

Special Features

- Can be used for shutter thickness from 16 to 26mm.
- 11 mm deep metal cup
- 110° opening
- Drilling distance on the door $K = 4\text{mm}$
- Mounting Plate provided S-MP4-2.

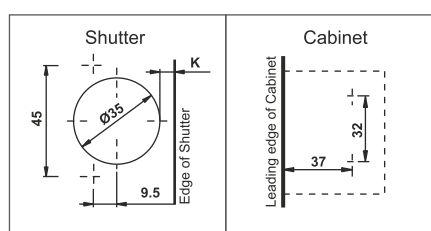

ITEM	ITEM CODE	SIZE (mm)	FINISH
Click on Special Hinge 110° - Overlay With Mounting plate 4 (S-MP4-2)	S2-HSP1	0	Plated
Click on Special Hinge 110° - Half Overlay With Mounting plate 4 (S-MP4-2)	S2-HSP3	9	Plated
Click on Special Hinge 110° - Inset With Mounting plate 4 (S-MP4-2)	S2-HSP4	17	Plated


165° Hinge



Overlay
S2-H165-1

Special Features

- It can be used for shutter thickness from 16mm to 28mm.
- 11 mm deep metal cup
- 165° opening
- Drilling distance on the door $K = 4\text{mm}$
- Mounting Plate provided S-MP1-3.

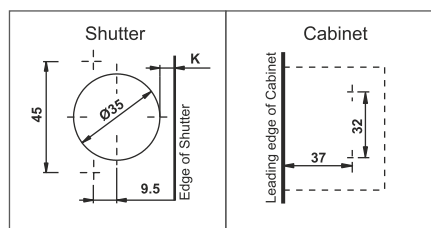

ITEM	ITEM CODE	SIZE (mm)	FINISH
165° Hinge - Overlay With Mounting plate 1 (S-MP1-3)	S2-H165-1	0	Plated
165° Hinge - Half Overlay With Mounting plate 1 (S-MP1-3)	S2-H165-2	9	Plated

SALICE
ONLY MADE IN ITALY




Hardware Solutions

Folding Door Hinge



Special Features

- 11 mm deep die-cast cup
- 35 mm cup diameter
- Opening angle of the first door = 70°
- Drilling distance on the door K = 4mm
- Max. thickness of the door with square edges: 23 mm.
- Mounting Plate provided S-MP1-3.

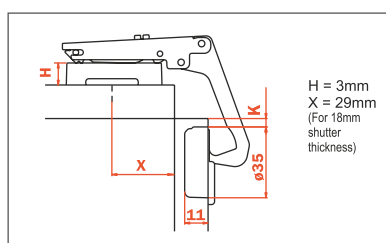


ITEM	ITEM CODE	SIZE (mm)	FINISH
Folding Door Hinge With Mounting plate 1 (S-MP1-3)	S2-HFD1	-	Plated

45° Cross Corner Hinge



Special Features

- 11 mm deep metal cup
- 35 mm cup diameter
- 94° opening
- Drilling distance on the door K = 4mm
- Mounting Plate provided S-MP2-0.

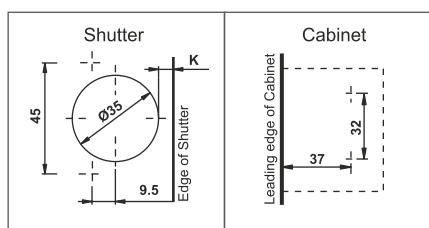

ITEM	ITEM CODE	Size in mm	FINISH
45° Cross Corner Hinge With Mounting plate 2 (S-MP2-0)	S2-H45	-	Plated

SALICE
ONLY MADE IN ITALY




Hardware Solutions

Blind Corner Hinge



Special Features

- 11 mm deep metal cup
- 94° opening
- Drilling distance on the door K = 4mm
- Mounting Plate provided S-MP1-3.

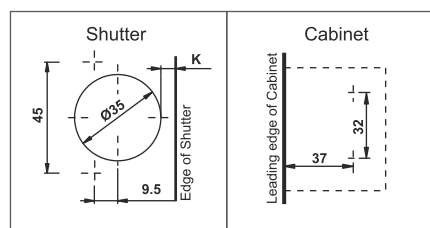


ITEM	ITEM CODE	SIZE (mm)	FINISH
Blind Corner Hinge With Mounting plate 1 (S-MP1-3)	S2-HBC1	-	Plated

Mini Hinge



Special Features

- It can be used for shutter thickness from 16 to 23mm.
- 26mm cup diameter
- Bright nickel plated steel cup and arm.
- 11.5mm deep metal cup
- 94° opening.
- Drilling distance on the door K = 4mm
- Mounting Plate provided S-MP1-3.

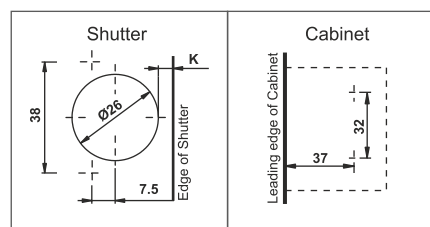

ITEM	ITEM CODE	SIZE (mm)	FINISH
Mini Hinge Overlay With Mounting plate 1 (S-MP1-3)	S6-HM-1-26	0	Plated
Mini Hinge Half Overlay With Mounting plate 1 (S-MP1-3)	S6-HM-2-26	9	Plated

SALICE
ONLY MADE IN ITALY




Hardware Solutions

Thick Door Hinge - Ø35



Special Features

- It can be used for shutter thickness up to 35mm.
- 11 mm deep metal cup
- Bright nickel plated steel cup and arm.
- 94° opening
- Drilling distance on the door $K = 4\text{mm}$
- Mounting Plate provided S-MP3-3.

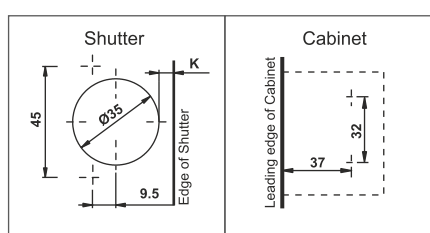


ITEM	ITEM CODE	SIZE (mm)	FINISH
Thick Door Hinge Ø35 - Overlay With Mounting plate 3 (S-MP3-3)	S2-HTD1	0	Plated
Thick Door Hinge Ø35 - Half Overlay With Mounting plate 3 (S-MP3-3)	S2-HTD2	9	Plated

Thick Door Hinge - Ø40



Special Features

- It can be used for shutter thickness up to 40mm.
- 13 mm deep steel cup
- Bright nickel plated steel cup and arm.
- 40 mm cup diameter
- 94° opening
- Drilling distance on the door $K = 4\text{mm}$
- Mounting Plate provided S-MP3-3.

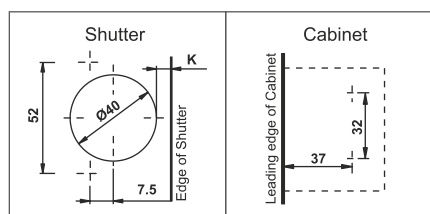


ITEM	ITEM CODE	SIZE (mm)	FINISH
Thick Door Hinge Ø40 - Overlay With Mounting plate 3 (S-MP3-3)	SF-HTD1-40	0	Plated
Thick Door Hinge Ø40 - Half Overlay With Mounting plate 3 (S-MP3-3)	SF-HTD2-40	9	Plated

SALICE
ONLY MADE IN ITALY




Hardware Solutions

Silentia - 110°

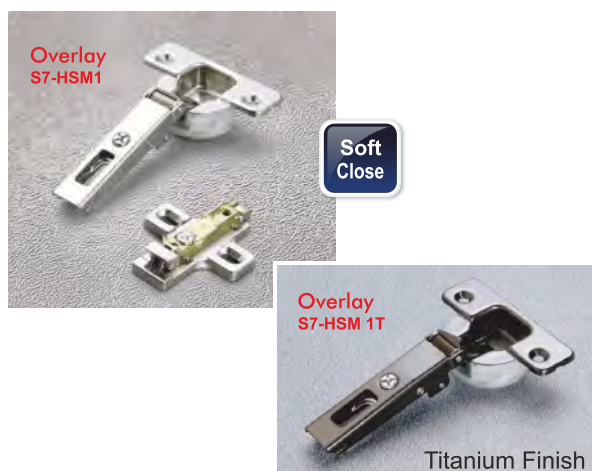

Special Features

- It can be used for shutter thickness from 18 to 26mm.
- 12mm and 13.5mm deep cup. 13.5mm for hinge with Titanium finish.
- Bright nickel plated steel cup and arm.
- 110° opening.
- Drilling distance on the door $K = 4\text{mm}$.
- Mounting Plate provided S-MP3-3. Mounting Plate S-MP4T for hinge with Titanium finish.

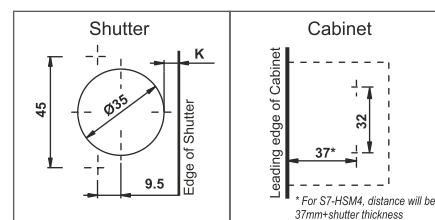


ITEM		Size in mm	FINISH
Silentia 110° - Overlay (Titanium Finish) with Mounting Plate 3 (S-MP4T)	S7-HSM 1T	0	Plated
Silentia 110° - Overlay with Mounting Plate 3 (S-MP3-3)	S7-HSM1	0	Plated
Silentia 110° - Half Overlay with Mounting Plate 3 (S-MP3-3)	S7-HSM3	9	Plated
Silentia 110° - Inset with Mounting Plate 3 (S-MP3-3)	S7-HSM4	17	Plated
Silentia 110° - Overlay (12mm deep drilling for Cup) with Mounting Plate 3 (S-MP3-3)	S7-HSM1-12	0	Plated
Silentia 110° - Half Overlay (12mm deep drilling for Cup) with Mounting Plate 3 (S-MP3-3)	S7-HSM3-12	9	Plated
Silentia 110° - Inset (12mm deep drilling for Cup) with Mounting Plate 3 (S-MP3-3)	S7-HSM4-12	17	Plated
Silentia 110° - Overlay (12mm deep drilling for Cup) with Mounting Plate 1 (S-MP1-3)	S8-HSM1-12	0	Plated
Silentia 110° - Half Overlay (12mm deep drilling for Cup) with Mounting Plate 1 (S-MP1-3)	S8-HSM3-12	9	Plated

Silentia - 155°



Special Features

- It can be used for shutter thickness from 16mm to 26mm.
- 13.5mm deep cup
- 155° opening.
- Drilling distance on the door $K = 4\text{mm}$
- Mounting Plate provided S-MP3-3.

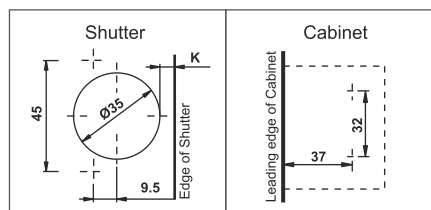


ITEM	ITEM CODE	SIZE (mm)	FINISH
155° Silentia Overlay With Mounting plate 3 (S-MP3-3)	S2-H155-1	0	Plated
155° Silentia Half Overlay With Mounting plate 3 (S-MP3-3)	S2-H155-3	9	Plated

SALICE
ONLY MADE IN ITALY




Hardware Solutions

Push Open Hinge - 110°

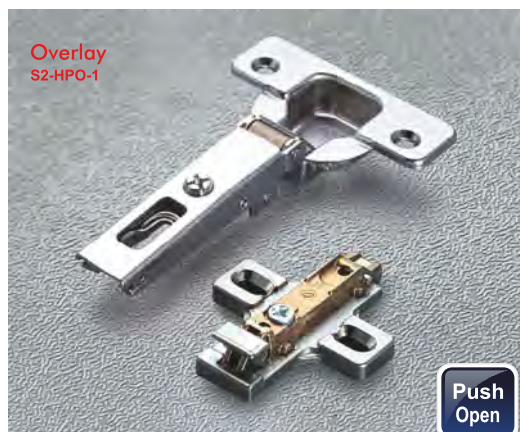

Special Features

- It can be used for shutter thickness from 16mm to 26mm.
- 11 mm deep metal cup
- Bright nickel plated steel cup and arm.
- 110° opening
- Drilling distance on the door $K = 4\text{mm}$
- To be used with Magnetic Release Device (S-MRD1)
- Mounting Plate provided S-MP3-3.

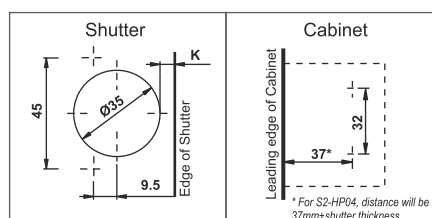


Magnetic Release Device




ITEM	ITEM CODE	SIZE (mm)	FINISH
Push open Hinge 110 - Overlay With Mounting plate 3 (S-MP3-3)	S2-HPO-1	0	Plated
Push open Hinge 110 - Half Overlay With Mounting plate 3 (S-MP3-3)	S2-HPO-3	9	Plated
Push open Hinge 110 - Inset With Mounting plate 3 (S-MP3-3)	S2-HPO-4	17	Plated

Push Open Hinge - 165°

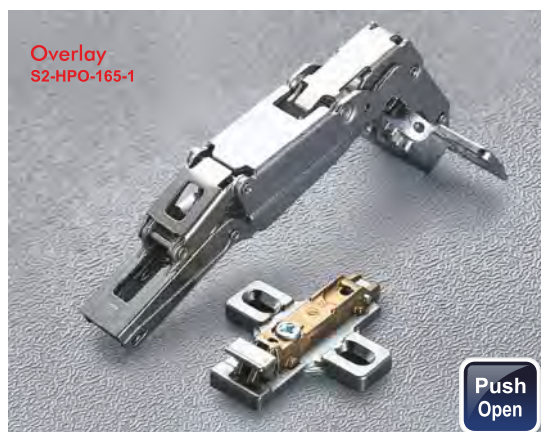

Special Features

- 11 mm deep die-cast cup
- 35 mm cup diameter
- 165° opening.
- Drilling distance on the door $K = 4\text{mm}$
- Max. thickness of the door with square edges: 23 mm.
- Mounting Plate provided S-MP1-3.

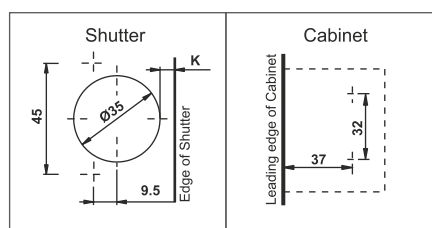

Magnetic Release Device



ITEM	ITEM CODE	SIZE (mm)	FINISH
165° Push Open Hinge - Overlay With Mounting plate 3 (S-MP3-3)	S2-HPO-165-1	0	Plated
165° Push Open Hinge - Half Overlay With Mounting plate 3 (S-MP3-3)	S2-HPO-165-3	9	Plated

SALICE

ONLY MADE IN ITALY




Hardware Solutions

Mounting Plates




(Mounting Plate 1)

ITEM CODE	FINISH
S-MP1-3	Plated




(Mounting Plate 2)

ITEM CODE	FINISH
S-MP2-0	Plated




(Mounting Plate 3)

ITEM CODE	FINISH
S-MP3-3	Plated




(Mounting Plate 4)

ITEM CODE	FINISH
S-MP4-2	Plated



(Mounting Plate 4T)


ITEM CODE	FINISH
S-MP4T	Titanium



Push Open Device



ITEM CODE	FINISH
S-POD1	Beige




Smove




(Smove Light)

ITEM CODE	SIZE
S-SMV1	Ø10mm



(Smove Heavy)


ITEM CODE	SIZE
S-SMV2	Ø10mm



Magnetic Release Device



ITEM CODE	SIZE
S-MRD1	Ø10mm



Smove Adaptor



ITEM CODE	FINISH
S-SMVA-1	Grey

SALICE

ONLY MADE IN ITALY

Unica




Hardware Solutions




Special Features

- Full Extension Runner System fixed to the drawer by locating pin.
- The push self-opening system for handle-less drawers is fully integrated in to the runner.
- A slight pressure on the drawer frontal is sufficient for the drawer to self-open.
- The smove decelerated closing action is also fully integrated in to the runner.


Drilling positions for
runner on cabinet side

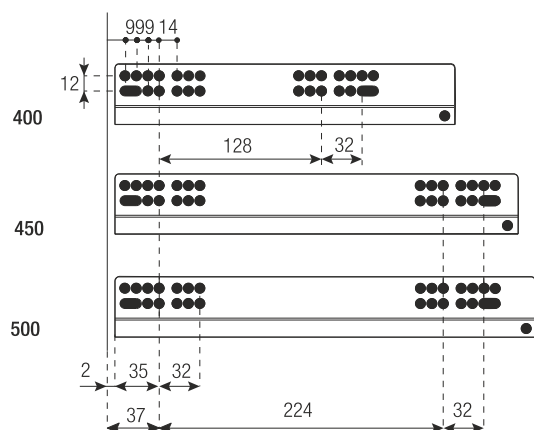


Drawer Dimensions

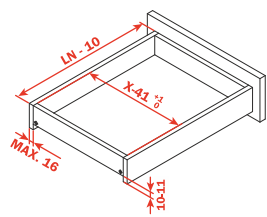


Drawer with frontal
(view from above)

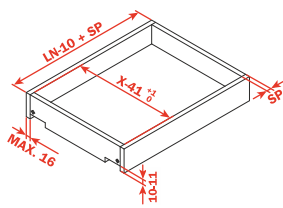

Internal drawer
(view from above)

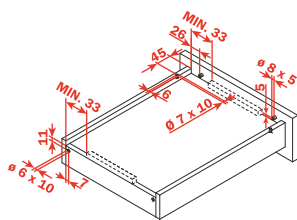


Drawer with frontal
(view from below)

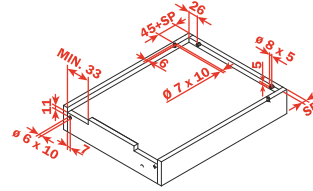

Internal drawer
(view from below)

Dimensions

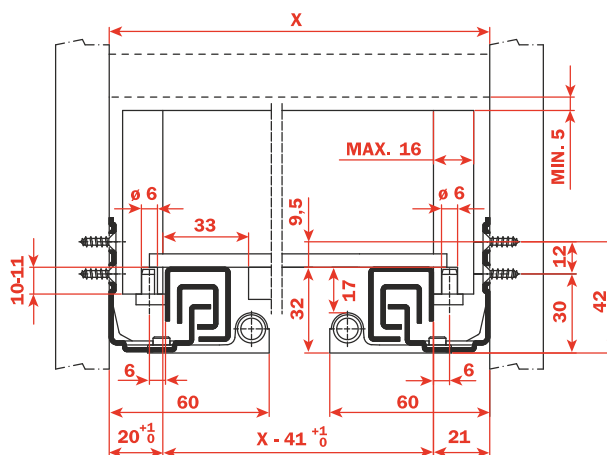

SALICE
ONLY MADE IN ITALY



Hardware Solutions


Un!ca

OPENING WITHOUT HANDLE

Push the frontal to open the drawer.



The drawer opens approximately 5 - 10 cm.

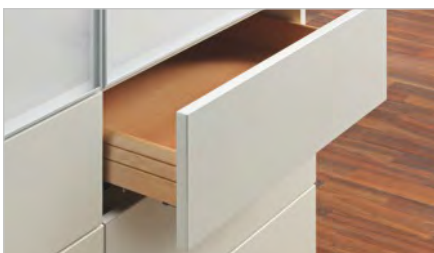

Open the drawer to access the inner space.



Open drawer.



Closing with decelerating effect.



OPENING WITH HANDLE

Pull the handle to open the drawer.





Open drawer.




Closing with decelerating effect.



Fixing of the drawer security pin

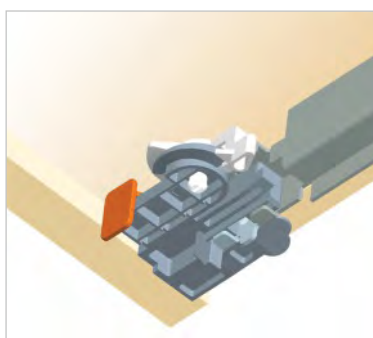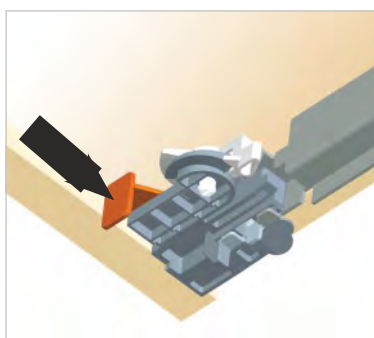

Drawer adjustment

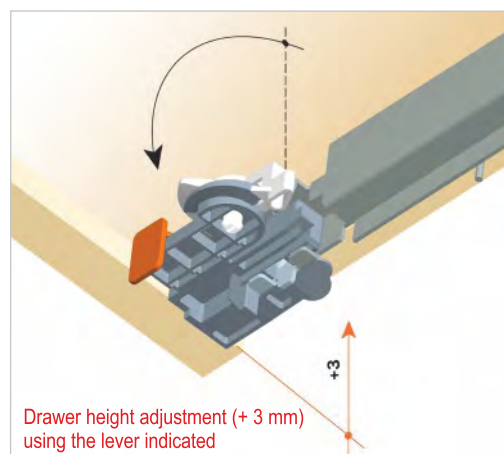

SALICE
ONLY MADE IN ITALY


Un!ca

INSTALLATION OF THE DRAWER

Extend the runners.




Close the drawer in order to locate it onto the locating pin of the runner.

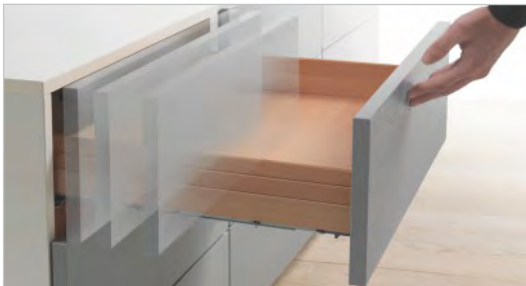

Place the drawer on the runners.



Engage the drawer security pin.

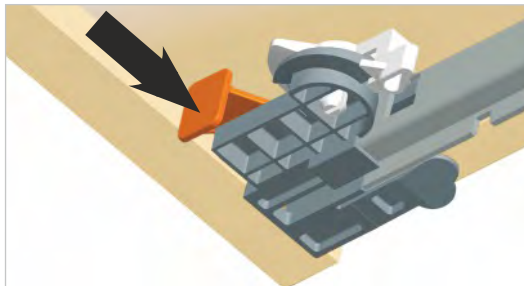


REMOVAL OF THE DRAWER

Push or pull the frontal to open the drawer.



Disengage the drawer security pin.

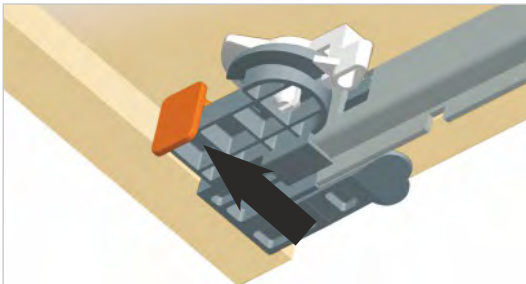

Open the drawer completely.



Lift and disengage the drawer.



SALICE
ONLY MADE IN ITALY



Hardware Solutions

Futura Drawer Slide - Push



ITEM CODE	SIZE (mm)
AD FP1-40	400
AD FP1-45	450
AD FP1-50	500
AD FP1-55	550

Special Features

- Dynamic load capacity: N 294 (30kg)
- With push opening system
- Safety system that prevents the drawer from turning over during transport
- Drawer height adjustment (+3mm)
- Pull drawer straight out
- Drawer fixing without screws
- The drawer, when closed, is blocked
- Finish: Bright zinc plate.

Futura Drawer Slide - Smove



ITEM CODE	SIZE (mm)
AD FM1-40	400
AD FM1-45	450
AD FM1-50	500
AD FM1-55	550

Special Features


- Dynamic load capacity: N 294 (30kg)
- With smove decelerated closing
- Safety system that prevents the drawer from turning over during transport
- Drawer height adjustment (+3mm)
- Pull drawer without screws
- Finish: Bright zinc plate.

SALICE
ONLY MADE IN ITALY

Flap Door System



Folding Door System

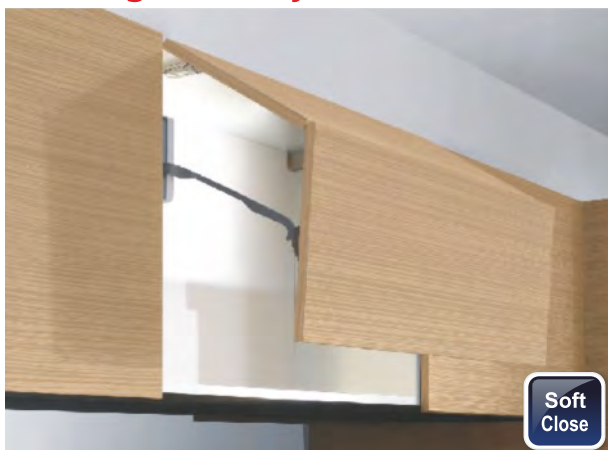

Swing Door System



Hardware Solutions

Special Features

- Ideally used for the kitchen overhead cabinets where the entire cabinet space can be utilized.
- The system is with easy opening and soft closing.
- Available either in a set of right or left with various load capacity pistons to choose from as per the load of the shutter.

- The folding door system with an opening upward with a fold at the centre is ideal for higher wall cabinets in kitchens.
- Opens with ease and is soft closing.
- Available either in a set of right or left with various load capacity pistons to choose from as per the load of the shutter.

- Ideal for Kitchen Overhead wall cabinets as the shutter swings up and over the cabinet allowing maximum access.
- Also sleek design gives an aesthetic look.
- The smooth in the mechanism makes the closing effortless and soft closing.
- Can be used for wooden shutters as well as shutters with aluminum profiles.
- Available in a set of left and right with various load capacity pistons to choose from as per the load of the shutter.

SALICE
ONLY MADE IN ITALY



Hardware Solutions

Flap Door System

FULL SET* = A (LIFT ARM) + B (GAS PISTON) + C (SMOVE)

	ITEM	ITEM CODE	FINISH
A	Flap Door Arm (Left) with Mounting Plate	LS-FPAL-1 [#]	Grey / Silver
	Flap Door Arm (Right) with Mounting Plate	LS-FPAR-1 [#]	
B**	Gas Pistons (Standard)	150N	Silver / Black
		200N	
		250N	
		300N	
		350N	
		400N	
		450N	
		500N	
	Gas Pistons (Progressive)	550N	
		150N	
		200N	
		250N	
		350N	
		450N	
C	Smove	LS-SMS	Plastic
		LS-SM7	
		LS-SM8	
		LS-SMF	
	Smove for Push Open Flap Door	LS-SMP	Plastic



* a) Recommended Overlay Hinges. Options are S9-HS1 or S8-HC1 or S2-HSP1 (2 or 3 Nos. depending upon the width of the shutter).

b) To make the Lift Systems Push Open, use S2-HPO1 Hinge (2 or 3 Nos. depending upon the width of the shutter) along with the Smove LS-SMP & corresponding selection of STANDARD GAS PISTONS

** Gas Pistons (Standard) are to be used when the door is required to open fully in a single operation.

Gas Pistons (Progressive) operate progressively and allow the door to stop at any position in the opening cycle.

#Add 'WH' or 'SF' to the code for Salice Lift Arm Cover in White or Special Finish respectively.

Correct Product Selection (Based on 18mm particle board).
APPLICATION WITH ONLY ONE ARM {(A) LEFT OR RIGHT}

STANDARD PISTON			
Shutter Height (mm) Shutter Width (mm)	300-330	360	400
600	+ (LS-GPS-150) + (LS-SMS)		
900	+ (LS-GPS-200) + (LS-SMS)		
1200	+ (LS-GPS-250) + (LS-SMS)		

PROGRESSIVE PISTON			
Shutter Height (mm) Shutter Width (mm)	300-330	360	400
600	+ (LS-GPP-150) + (LS-SMS)		
900			
1200			

Correct Product Selection (Based on 18mm particle board).
APPLICATION WITH TWO ARMS {(A) LEFT + RIGHT}

STANDARD PISTON			
Shutter Height (mm) Shutter Width (mm)	480	600	720
600	+ (LS-GPS-200) + (LS-SM7)	+ (LS-GPS-250) + (LS-SM7)	+ (LS-GPS-300) + (LS-SMS)
900	+ (LS-GPS-300) + (LS-SMS)	+ (LS-GPS-350) + (LS-SMS)	+ (LS-GPS-400) + (LS-SMS)
1200	+ (LS-GPS-400) + (LS-SMS)	+ (LS-GPS-450) + (LS-SM8)	+ (LS-GPS-500) + (LS-SM8)

PROGRESSIVE PISTON			
Shutter Height (mm) Shutter Width (mm)	480	600	720
600	+ (LS-GPP-150) + LS-SMS		
900			+ (LS-GPP-150) + (LS-SM8)
1200	+ (LS-GPP-250) + (LS-SMS)		+ (LS-GPP-350) + (LS-SMF)

SALICE

ONLY MADE IN ITALY



Hardware Solutions

Folding Door System

FULL SET* = A (LIFT ARM) + B (GAS PISTON) + C (SMOVE)

	ITEM	ITEM CODE	FINISH
A	Folding Door Arm (Left) Ht. 600mm with Mounting Plates & Central Hinges	LS-FDAL-60 [#]	Grey / Silver
	Folding Door Arm (Right) Ht. 600mm with Mounting Plates & Central Hinges	LS-FDAR-60 [#]	
	Folding Door Arm (Left) Ht. 720mm with Mounting Plates & Central Hinges	LS-FDAL-72 [#]	
	Folding Door Arm (Right) Ht. 720mm with Mounting Plates & Central Hinges	LS-FDAR-72 [#]	
B**	Gas Pistons (Standard)	150N	Silver / Black
		200N	
		250N	
		300N	
		350N	
		450N	
	Gas Pistons (Progressive)	550N	
		150N	
		250N	
		350N	
		450N	
		500N	
		700N	
		LS-GPP-700	
C	Smove	LS-SMS	Plastic
		LS-SM7	
		LS-SM8	
		LS-SMF	



* Recommended Overlay Hinges. Options are S9-HS1 or S8-HC1 or S2-HSP1 (2 or 3 Nos. depending upon the width of the shutter).

** Gas Pistons (Standard) are to be used when the door is required to open fully in a single operation.

Gas Pistons (Progressive) operate progressively and allow the door to stop at any position in the opening cycle.

#Add 'WH' or 'SF' to the code for Salice Lift Arm Cover in White or Special Finish respectively.

Correct Product Selection (Based on 18mm particle board).
APPLICATION WITH ONLY ONE ARM {(A) LEFT OR RIGHT}

STANDARD PISTON		
Shutter Height (mm)	600	720
Shutter Width (mm)	600	+(LS-GPS-300) + (LS-SMS)

PROGRESSIVE PISTON		
Shutter Height (mm)	600	720
Shutter Width (mm)	600	+(LS-GPP-200) + (LS-SMS)

Correct Product Selection (Based on 18mm particle board).
APPLICATION WITH TWO ARMS {(A) LEFT + RIGHT}

STANDARD PISTON		
Shutter Height (mm)	600	720
Shutter Width (mm)	900	+(LS-GPS-350) + (LS-SMS) + (LS-GPS-450) + (LS-SM8)
	1200	+(LS-GPS-450) + (LS-SM8) + (LS-GPS-550) + (LS-SMF)

PROGRESSIVE PISTON		
Shutter Height (mm)	600	720
Shutter Width (mm)	900	+(LS-GPP-200) + (LS-SMS) + (LS-GPP-350) + (LS-SM8)
	1200	+(LS-GPP-350) + (LS-SM8) + (LS-GPP-450) + (LS-SMF)

Swing Door System

FULL SET = A (LIFT ARM) + B (GAS PISTON) + C (SMOVE)

	ITEM	ITEM CODE	FINISH
A	Swing Door Arm (Left + Right) with Mounting Plate	LS-SWDA-1	Grey / Silver
B**	Gas Pistons (Standard)	150N	Silver / Black
		200N	
		250N	
		300N	
		350N	
		450N	
	Gas Pistons (Progressive)	550N	
		150N	
		250N	
		350N	
		450N	
		500N	
		700N	
		LS-GPS-150	
		LS-GPS-200	
		LS-GPS-250	
		LS-GPS-300	
		LS-GPS-350	
		LS-GPS-450	
		LS-GPS-550	
		LS-GPP-150	
		LS-GPP-250	
		LS-GPP-350	
		LS-GPP-450	
		LS-GPP-500	
		LS-GPP-700	
C	Smove	LS-SMS	Plastic
		LS-SM7	
		LS-SM8	
		LS-SMF	



** Gas Pistons (Standard) are to be used when the door is required to open fully in a single operation.

Gas Pistons (Progressive) operate progressively and allow the door to stop at any position in the opening cycle.

#Add 'WH' or 'SF' to the code for Salice Lift Arm Cover in White or Special Finish respectively.

Correct Product Selection (Based on 18mm particle board).

APPLICATION WITH SET OF ARMS {(A) LEFT + RIGHT}

STANDARD PISTON

Shutter Height (mm) Shutter Width (mm)	360	480	600	660	720
600	+ (LS-GPS-150) + (LS-SM7)		+ (LS-GPS-250) + (LS-SM7)	+ (LS-GPS-250) + (LS-SMS)	+ (LS-GPS-300) + (LS-SMS)
900	+ (LS-GPS-250) + (LS-SMS)		+ (LS-GPS-300) + (LS-SMS)		+ (LS-GPS-450) + (LS-SM8)
1200			+ (LS-GPS-350) + (LS-SM8)	+ (LS-GPS-450) + (LS-SM8)	+ (LS-GPS-550) + (LS-SMF)

PROGRESSIVE PISTON

Shutter Height (mm) Shutter Width (mm)	360	480	600	660	720
600	+ (LS-GPP-150) + (LS-SM7)				
900			+ (LS-GPP-150) + (LS-SMS)	+ (LS-GPP-250) + (LS-SM8)	
1200			+ (LS-GPP-250) + (LS-SM8)	+ (LS-GPP-350) + (LS-SM8)	+ (LS-GPP-450) + (LS-SMF)

National Distributor Network

WEST ZONE

MAHARASHTRA

MUMBAI

Aseem Enterprises

Tel.: 022-40034530 / 31 / 33 / 34.
Fax: 022-40034536.
Email: aseementerprises@hotmail.com

PUNE

Classic Sales Corporation

Tel.: 020-26384555 / 26382148.
Mobile: 09371016787. Fax: 020-26382500.
Email: classic2500@gmail.com / classicsalescorporation@gmail.com

Classic Enterprises

Tel.: 020-26381925 / 26. Fax: 020-26381924.
Email: classic1925@gmail.com

NASIK

Navneet Enterprises

Tel.: 0253-2596447 / 2596448.
Mobile: 09822088621.
Email: sbdenmutha2002@yahoo.com / santoshnbedmutha@gmail.com

AKOLA

Radha Soami Hardwares

Tel.: 0724-2426700 / 2423700.
Mobile: 09422162300. Fax: 0724-2427700.
Email: radhasoamihw@gmail.com

NAGPUR

Raj Agencies

Telefax: 0712-2221637 / 2221638.
Email: rajagencies1@hotmail.com

GOA

PANJIM

Krishna Corporation

Tel.: 0832-2458864, 6512764. Mobile: 09823082764. Fax: 0832-2458864.
Email: info@krishnagoa.com

MADHYA PRADESH

INDORE

Shree Jee's Hardware

Tel.: 0731-2532765. Mobile: 09425311239 / 09425065039. Fax: 0731-4040800.
Email: shreejee2009@rediffmail.com

GUJARAT

AHMEDABAD

Swift Marketing

Telefax: 079-30001574. Mobile: 09374388822 / 09374388855 / 09998053821.
Email: swift_marketing@yahoo.com

BARODA & SURAT

Prabhusurat Buildwares Pvt Ltd

Tel.: 0261-2543 312 / 2544 281.
Mobile: 09824144670 / 09824514410.
Email: prabhusurat@yahoo.com / prabhusurat@gmail.com

SOUTH ZONE

ANDHRA PRADESH

HYDERABAD

In-Effects Marketing

Tel.: 040-24747253 / 54 / 55.
Mobile: 09490749787 / 09246537152.
Fax: 040-24748252.
Email: info@ineffectsmarketing.com

SECUNDERABAD

Standard Trading Company

Tel.: 040-27541048
Telefax: 040-27541048 / 40185163.
Email: standardtrading431@gmail.com

KARNATAKA

BANGALORE

South India Agencies

Tel.: 080-40500504 / 506 / 510 / 511 / 555 / 26754207 / 40500525 / 535.
Mobile: 09845114706 / 09945690004.
Fax: 080-40500505 / 515.
Email: info@southindiaagencies.com / ebco@southindiaagencies.com / mukesh@southindiaagencies.com

MYSORE

South India Agencies (Mysore Branch)

Tel.: 0821-6453556. Fax: 0821-4266881.
Email: sia_india@hotmail.com / siasouth@yahoo.co.in

TAMIL NADU

CHENNAI

Rams Fittings & Acc. P. Ltd.

Tel.: 044-24611937 / 24620328 / 24935361. Mobile: 09840241580 / 09840841382 / 09840302283.
Fax: 044-24612568.
Email: rfagpesales@gmail.com / rfagpepurchase@gmail.com / rameshsumathi2006@gmail.com

COIMBATORE

Oasis Enterprises

Tel.: 0422-2540634 / 6541144.
Fax: 0422-2540634.
Email: oasis555@rediffmail.com

Bharat Agencies

Telefax: 0422-2548316 / 2551039 / 4366389. Mobile: 09443310010.
Email: bharat_cbe@rediffmail.com

KERALA

North Kerala

CALICUT

Concord Enterprises (Branch Office)

Tel.: 0495-2743331 / 2743221.
Email: conclt@vsnl.in

KOCHI

Concord Enterprises

Tel.: 0484-2346229 / 4028208.
Mobile: 09947261229. Fax: 0484-2341585.
Email: info@concordkerala.com / accounts@concordkerala.com

South Kerala

KOCHI

Technical Trade Links

Tel.: 0484-2344603 / 2333394 / 95.
Fax: 0484-2342147.
Email: tlcochin@gmail.com

NORTH ZONE

NEW DELHI

NEW DELHI

Raj Trading Company

Tel.: 011-29834285 / 29832980 / 64739686. Fax: 011-29834283.
Email: raj_trading_co@hotmail.com
Web: www.rajtrading.in

HARYANA

CHANDIGARH

Modcons Marketing

Tel.: 0172-2740738 / 5074842.
Fax: 0172-5074842. Mobile: 09814191523.
Email: modconsy2k@yahoo.com

PUNJAB

LUDHIANA

ESS ELL Enterprises

Mobile: 098039 20600 / 09023352315.
Email: essellententerprises@gmail.com

KASHMIR

SRINAGAR

Ply Emporium

Telefax: 0194-2440282.
Mobile: 09419006514 / 09419003004 / 09419006877.
Email: plyemporium@hotmail.com

RAJASTHAN

JAIPUR

Prakash Metals

Tel.: 0141-2315683 / 2319074 / 2220132
Fax: 0141-2319074.
Email: prakashmetals@rediffmail.com

UTTAR PRADESH

LUCKNOW

Anand Enterprises

Mobile: 09838201783 / 09628368705.
Telefax: 0522-4045460.
Email: anandrathi@rediffmail.com

EAST ZONE

WEST BENGAL

KOLKATA

Build Associates

Tel.: 033-24541750 / 24556717 / 65008247.
Fax: 033-24556717.
Email: buildassociates@yahoo.com

Raj Industries

Tel.: 033-22106913. Mobile: 09830443434.
Email: rajindustriesajay@gmail.com

JHARKHAND

RANCHI

Hardware Unlimited

Tel.: 0651-2209499. Mobile: 09431109411.
Email: info@hardwareunlimited.in

ORISSA

BHUBANESHWAR

Trimurti

Tel.: 0674-2535515 / 2537460.
Fax: 0674-2533799.
Mobile: 09437101010.
Email: trimurti1979@gmail.com

ASSAM

GUWAHATI

Om Hardware Store

Tel.: 0361-2738928.
Mobile: 09435111409.
Email: omhardwarestore@gmail.com / omhardwarestore@yahoo.co.in

CHATTISGARH

RAIPUR

Shree Jee's Hardware (Branch Office)

Mobile: 09406251311 / 07773014904.
Email: shreejee2009@rediffmail.com / shreejeeraipur@gmail.com

BIHAR

PATNA

Apple Hardware Solutions

Tel.: 0612-2260132.
Mobile: 09905023397.
Email: appleatebco@yahoo.in

DISPLAY CENTRES:

Mumbai

Ebco Pvt. Ltd.

Tel.: 022-6783 7777 / 88.
Email: info@ebco.in / marketing@ebco.in

New Delhi

Ebco Pvt. Ltd.

Tel.: 011-25457584. Mobile: 09899112958.
Email: ebco.delhi@ebco.in

Bangalore

L'ATELIER

Mobile: 09845123554 / 08123113218.
Email: ebco.bangalore@ebco.in

Chennai

Rams Fittings & Acc. P. Ltd.

Tel.: 044-24611937 / 24620328 / 24935361. Mobile: 09840241580 / 09840841382 / 09840302283.
Fax: 044-24612568.
Email: rfagpesales@gmail.com / rfagpepurchase@gmail.com / rameshsumathi2006@gmail.com

Hyderabad

In-Effects Marketing

Tel.: 040-23557252.
Mobile: 09666152786 / 09666478673.

Kochi

Technical Trade Links

Tel.: 0484-2333395.
Mobile: 09447701322 / 08089100100.
Email: ebco.kochi@ebco.in

Coimbatore

Bharat Agencies

Tel.: 0422-2548316 / 2551039 / 4366389.
Mobile: 09443310010.
Email: ebco.coimbatore@ebco.in

Surat

Prabhusurat Buildwares Private Limited

Tel.: 0261-2234677. Mobile: 09824514410.
Email: prabhusurat@yahoo.com / prabhusurat@gmail.com

Bhubaneswar

Trimurti

Telefax: 0674-2533799.
Mobile: 09437101010.
Email: trimurti1979@gmail.com

Raipur

Shree Jee's Hardware

Tel.: 077-4032771.

CITY DISPLAY CENTRES:

MAHARASHTRA

Mumbai

Aseem Enterprises

Tel.: 022-40034530 / 31 / 33 / 34.
Fax: 022-40034536.
Email: aseementerprises@hotmail.com

Pune

Classic Gallerie

Telefax: 020-24260801.
Email: classicgallerie@gmail.com

Akola

Radha Soami Hardware

Tel.: 0724-2426700 / 2423700.
Mobile: 09422162300 / 09665305300.
Fax: 0724-2427700.
Email: ak_l_radhahw@sancharnet.in / radhasoamihw@gmail.com

Nagpur

Raj Agencies

Telefax: 0712-2221637 / 2221638.
Email: rajagencies1@hotmail.com

KERALA

Kochi

Concord Enterprises

Tel.: 0484-2346229 / 4028208.
Fax: 0484-2341585.
Email: info@concordkerala.com

Calicut

Concord Enterprises

Tel.: 0495-2743331 / 2743221.
Email: conclt@vsnl.in

RAJASTHAN

Jaipur

Prakash Metals

Tel.: 0141-2315683 / 2319074 / 2220132 / 3233366 / 3299262. Fax: 0141-2319074. Email: prakashmetals@rediffmail.com

MADHYA PRADESH

Indore

Shree Jee's Hardware

Mobile: 09425065039 / 08989549429 / 07773044902.
Email: shreejee2009@rediffmail.com

JHARKHAND

Ranchi

Hardware Unlimited

Tel.: 0651-2209499.
Mobile: 09431109411.
Email: info@hardwareunlimited.in



SALICE
ONLY MADE IN ITALY

Ebco Pvt. Ltd.

402-3, Hyde Park, Saki Vihar Road, Mumbai 400072. INDIA. Tel.: +91-22 67837777. Fax: +91-22 66920700. Email: info@ebco.in Website: www.ebco.in

National Display Centres:

Mumbai: 022-67837700. **Surat:** 0261-2234677/09824514410. **Chennai:** 044-24611937/24620328/9840302283.

Coimbatore: 0422-2548316/2551039/4366389. **Bangalore:** 08123113218. **Kochi:** 0484-2333395/09447701322/8089100100.

Hyderabad: 040-23557252. **Delhi:** 011-25457584. **Bhubaneshwar:** 0674-2533799. **Raipur:** 0771-4032771.

City Display Centres:

Mumbai: 022-40034530/31/33/34. **Pune:** 020-24260801. **Akola:** 0724-2426700, 2423700. **Nagpur:** 0712-2221637, 2221638.

Kochi: 0484-2346229, 4028208. **Calicut:** 0495-2743331, 2743221. **Jaipur:** 0141-2220132, 2315683. **Indore:** 9425311239/9425065039.

Kolkata: 9433347260/9830953823. **Ranchi:** 0651-2209499/9431109411.