

CABINET HANGER - CONCEALED

Special Features

- Specially designed concealed fitting for cabinets to hang on wall.
- Requires routing.
- System 32 compatible.
- Min. side panel thickness 18mm.
- Load capacity 300 kg. per pair.
- Can be used as set of 2 on top hung or set of 4 as shown in fig. 3.



Specifications

Code No.	Finish
CHC1	MC

Fitting Instructions

1. Drill hole of Ø8 x 15mm Deep in the cabinet as shown in fig.1
2. Use Ø10 & Ø12mm routing cutter on the back side of cabinet & screw the housing. (Ref. Fig.2a & 2b)
3. Place the hooks on the wall vertically & screw them as shown in fig.3 Kindly note details 'X' & 'Y'.



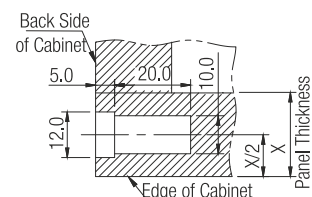


Fig. 1b (Top View)
Section View A-A

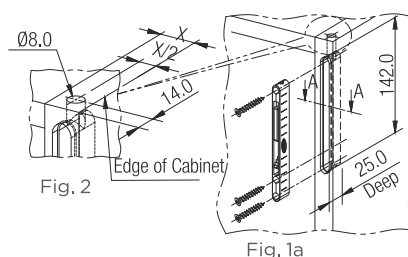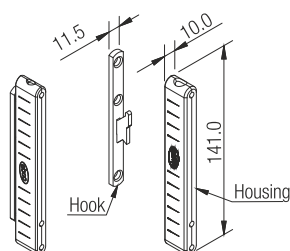