



[Home](#) » [Concealed Hinge - 2D Wall to Door](#)





Concealed Hinge - 2D Wall to Door

- For flush wooden door application.
- 2-dimensional adjustment after installation.
- Max door weight with 2 Hinges - 80 kgs
- Minimum door thickness - 40 mm
- Max door width - 1000 mm
- Max opening - 120°



Specifications

Model	Model Code	Size	Finish
Concealed Hinge -2D (For minimum Door thickness 40 mm) Wall to Door	CH2D-80WD	Max.Weight /2 Hinge -80Kgs Mini. Door Thick - 40 mm Max. door width - 1000mm Max. opening -120°	Silver



Fitting Instructions

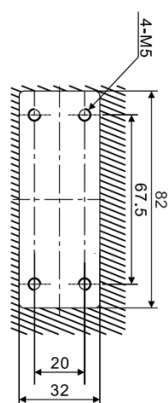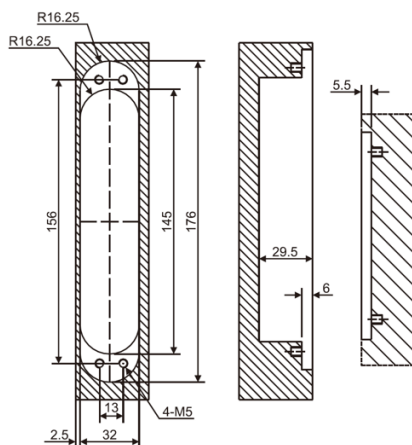

Top Hinge

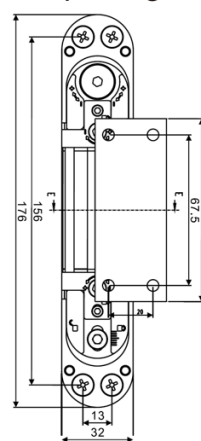


Bottom Hinge


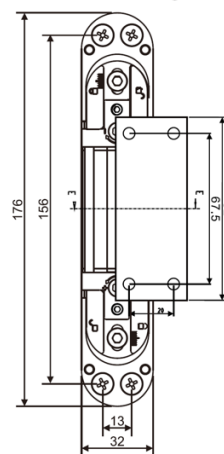


Installation situations




Wooden casing frame

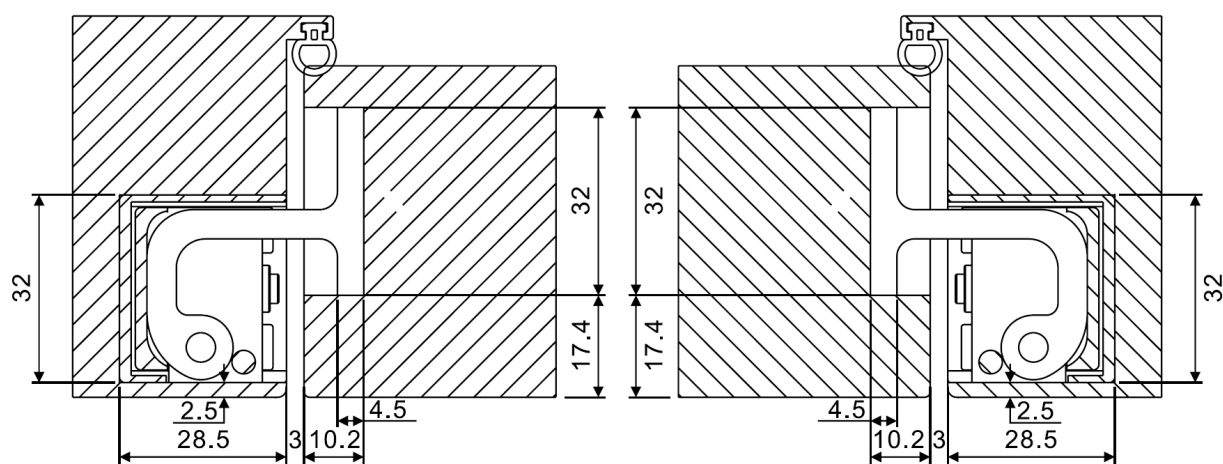

Screw the hinge using the enclosed M 5 screws.

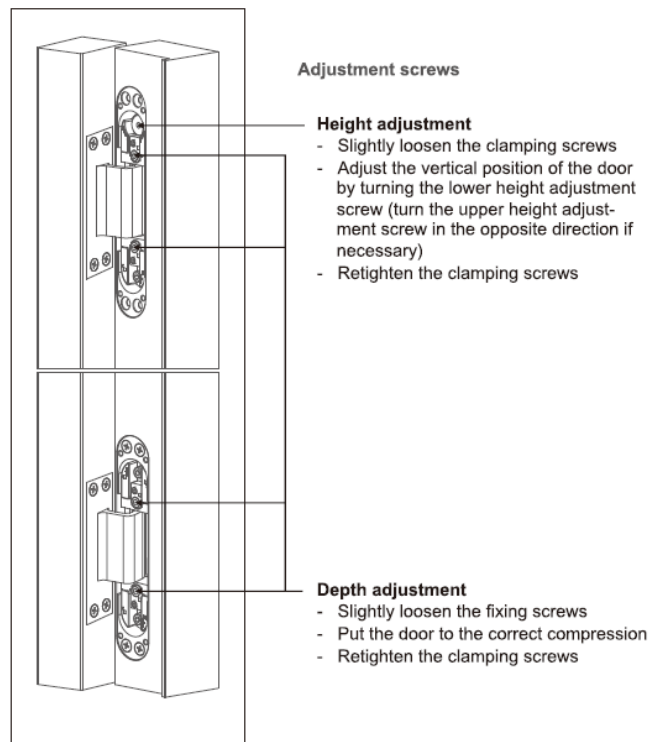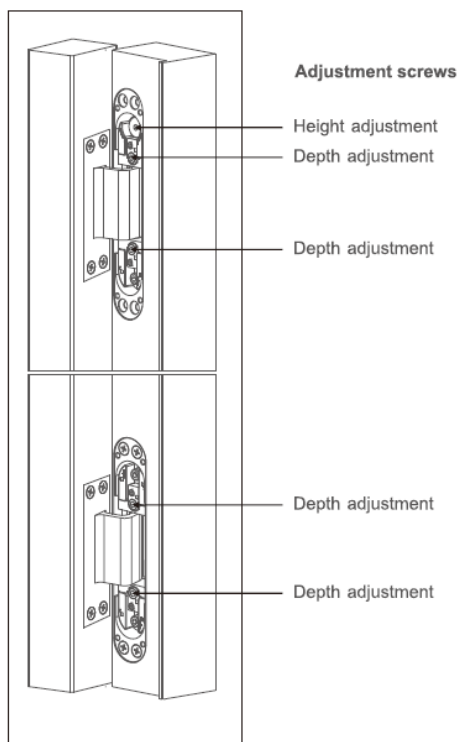

Minmum door thickness=40mm

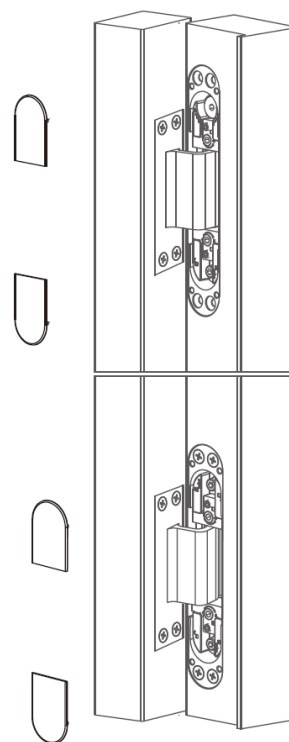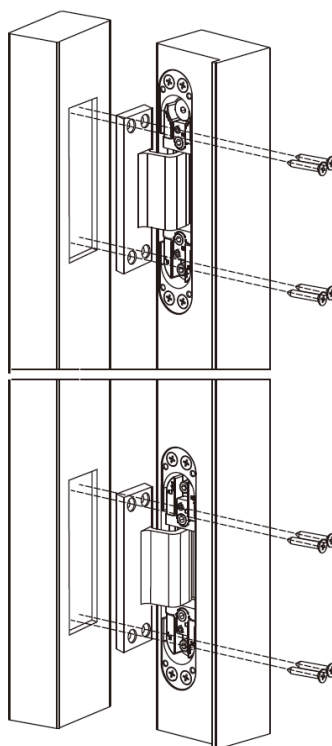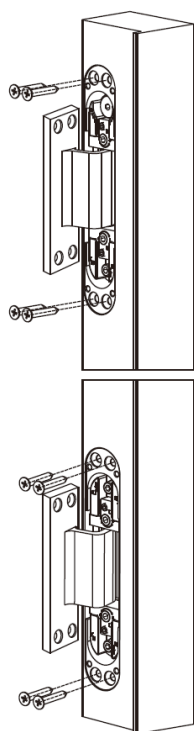

①

Conduct the routing, cutter 24 mm \varnothing , collar ring 32 mm \varnothing , screw hinge door part (marked as door) using 5 mm \varnothing wood screws.

②

Fasten hinge frame part depending on the frame type.
If required, please loose slightly the upper clamping screws for the height adjustment.
Block frame: Screw with 5 mm \varnothing wood screws

③

Screw the small cover plates using the enclosed tapping screws onto frame and door part.

