

# FRICTION STAY SS304

## Special Features

- Made of AISI 304 stainless steel.
- Pressure adjustable brake for stopping.
- Can be used in wood, aluminium or PVC windows
- Can be used for side hung horizontal axis opening ventilators, as well as top hung vertical axis opening windows.
- Self cleaning design.
- Available in independent left and right hand working for better closing and alignment.
- Finish : Raw Stainless Steel.




## Specifications

Code Nos.	L	Side Hung		Top Hung		Load (Kgs)	Max Opening angle	Gap for Stays 'A' (mm)	Min. Width 'B' (mm)	No. of Bars
	Size (Length mm)	Max. Shutter Width (mm)	Max. Shutter Height (mm)	Max. Shutter Width (mm)	Max. Shutter Height (mm)					
FRS 8	205 (8")	N.A.	N.A.	750	300	10	90°	15	19	4
FRS 16	405 (16")	600	1050	600	1270	24	90°	18	22	5
FRS 20	510 (20")	N.A.	N.A.	700	1525	30	30°/90°	18	22	5
FRS 24	610 (24")	N.A.	N.A.	800	2000	35	30°	18	22	5
FRS 28	710 (28")	N.A.	N.A.	900	2000	40	25°	18	22	5

## Fitting Instructions

1. Gap between shutter and frame should be 15mm for size 205mm and 18mm gap for 405mm, 510mm, 610mm and 710mm.
2. Width of stay is 19mm for size 205mm and 22mm for size 405mm, 510mm, 610mm and 710mm.

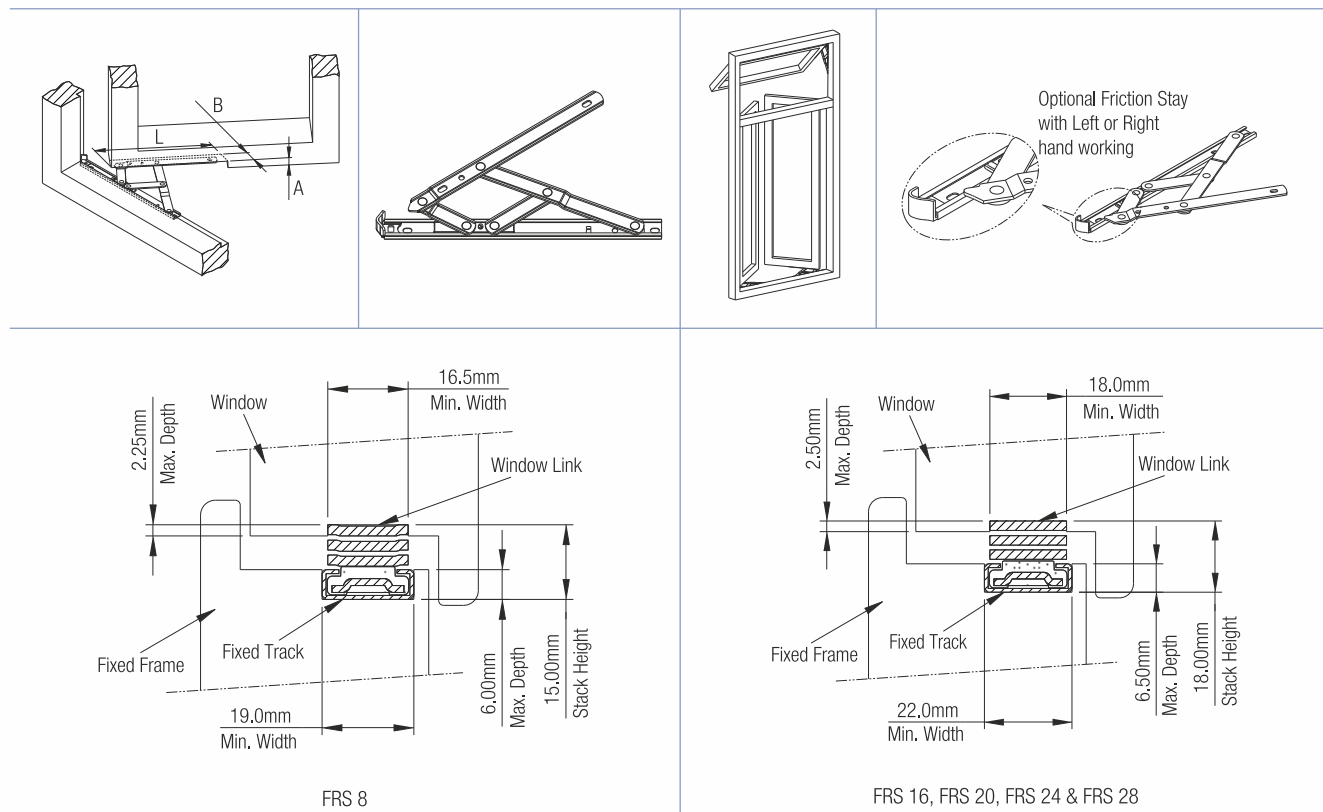

## Caution

- Construction rubble & dirt will damage the stay.
- Do not exceed specified load.
- Shutters must have corners at right angles.