



Special Features

- Simplifies construction of drawer as it eliminates the sides of drawer.
- Tilt & remove capability with guiding.
- Precision rollers for smooth running with front facia adjustment.
- 'Auto-Closing' of drawer.
- Stopper prevents drawer from falling.
- Ribbed for strength.
- 'System 32' Compatible.
- Load capability 25 Kgs..
- Saves Wood, Labour and Drawer space.
- Available with 6 mm bottom track, easy to fit and helps in faster assembly, as it does not require screwing the bottom, using 6 mm board in place of 9 mm or 12 mm.



Specifications

Code Nos.	Length mm	Extension mm	Finish
FPDS 250-40-6	400	325	Powder Coated Ivory
FPDS 250-45-6	450	375	

Fitting Instructions

1. Side gap of 15.5mm is required (Fig.1).
2. 25.4mm clearance from top edge of drawer required to tilt and remove drawer (Fig. 2).
3. Fixed slide should be set by 2mm for 'Auto-Closing' (Fig.2).
4. Screws should be recessed to avoid fouling.
5. Fixed slides should be fitted parallel and at equal heights to each other.
6. Front facia is to be fitted into front brackets which have 2 way adjustment for alignment.

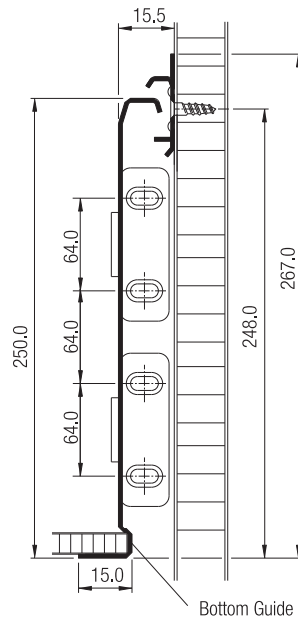
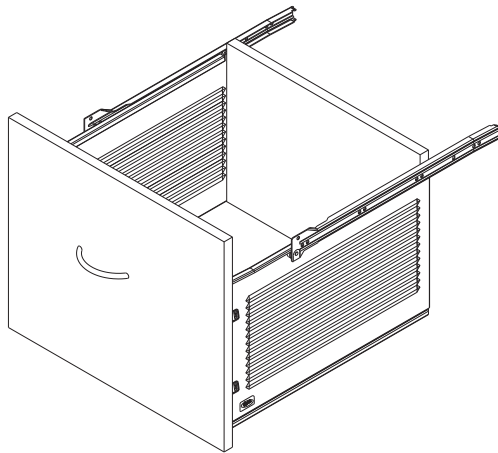


Fig. 1 FRONT VIEW

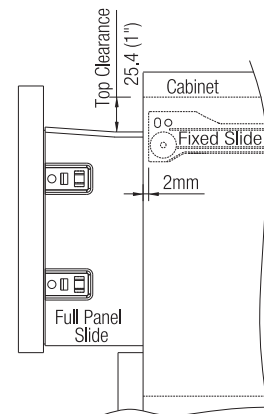


Fig. 2 SIDE VIEW

Caution

- For efficiency and durability.
- Strictly maintain side gap of 15.5mm per side.
- Fix slides parallel and at equal height.
- Do not apply paint or polish.