

PREMIUM SLEEK TELESCOPIC SLIDE - SOFT CLOSE- 45



Special Features

- Precision ball bearing.
- 30 mm stroke of Soft-Closing.
- Pull force 3.2-3.5 kgs.
- Soft-closing function built in slide, easy for installation.
- Non-handed Disconnect Release.




Specifications

Code Nos.	Size (mm)	Length (mm)	Extension (mm)	Max. Load (kgs.)	Finish
PSTDS30-SC	300	300	230	20	ZW
PSTDS35-SC	350	350	300	25	
PSTDS40-SC	400	400	400	35	
PSTDS45-SC	450	450	450	40	
PSTDS50-SC	500	500	500	45	
PSTDS55-SC	550	550	550	40	
PSTDS60-SC	600	600	600	35	

Fitting Instructions

1. To install Premium Sleek Telescopic Slide-Soft Close, 13.0 to 13.8 mm side gap per side is required between cabinet and drawer (Refer Fig. 1).
2. Fit Outer (Fixed) slide on to the inside of the cabinet, access to holes can be got through slots in Intermediate slide.
3. Slides should be fitted parallel and screws tightened fully to avoid gaps.
4. Fit Inner slide onto the outside of the drawer.
5. Now slide the drawer with Inner slide fitted on to the Intermediate slides on the cabinet till the latch engages automatically.

DRILLING DIAGRAM FOR CABINET

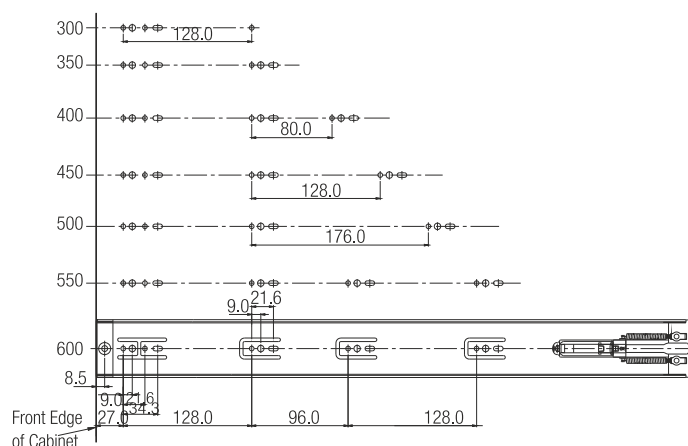

DRILLING DIAGRAM FOR DRAWER






Fig. 1

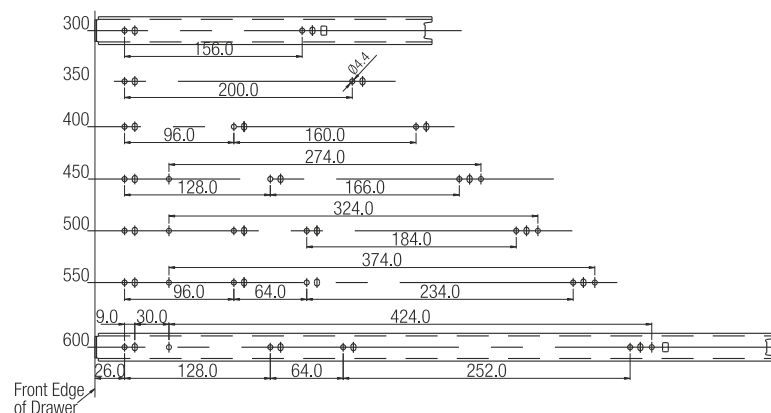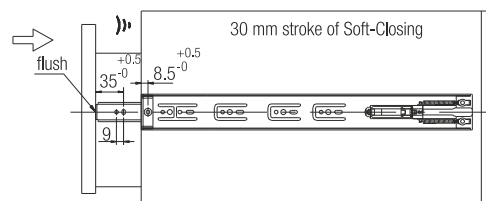

Caution

- For efficiency and durability.
- Strictly maintain 13.0 to 13.8 mm side gap.
 - Fit slides parallel and at equal heights.
 - Do not apply paint or polish.
 - Do not let saw dust enter into the slides.