



## Special Features

- Unique angled hand rest to prevent fatigue while working.
- Smooth quiet movement with ball bearings.
- Left or right side retractable mouse pad tray.
- Height adjustment on mounting brackets.
- Locks at extended position.
- Direct front installation.
- Max. load 12 kgs.



also available  
with Soft Palm

## Specifications

Item	Code Nos.	Finish
Without Mouse Tray	KTE1-35	BL/WT
	KTE1-45	
With Mouse Tray	KTE1-35M	
	KTE1-45M	

## Fitting Instructions

1. Minimum horizontal gap required 600 mm.
2. Screw the mounting brackets at 85 mm distance from the front edge of the table and to other 255 mm (Refer Fig. 1).
3. Drill as per drilling diagram Fig. 2.
4. Assemble height adjustment brackets on to slides using M4 screw provided as in Fig. 3.
5. Height adjustment bracket should be adjusted for desired height.

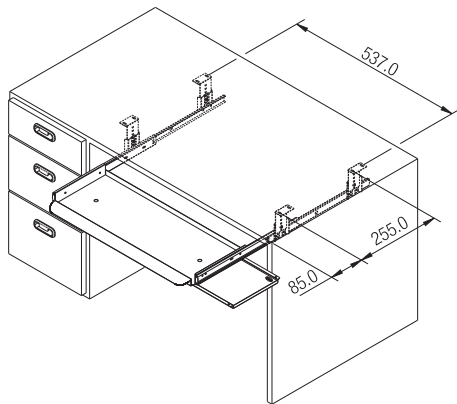


Fig. 1.




Fig. 2





Fig. 3



Also available with Soft Palm

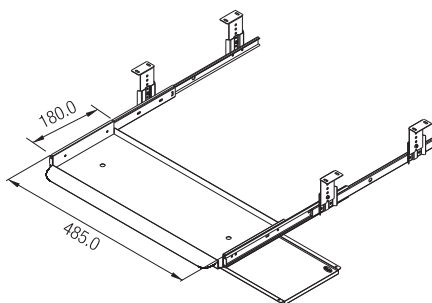