

HI SLIDE OVERLAY - AL. PROFILE SHUTTER FOR 3 DOOR / 3 DOOR WITH SOFT CLOSE 80KGS




Special Features

- Specially Designed for three Overlay top running Aluminium Profile Glass Shutters.
- Max. Load Upto 50 kgs / Shutter.
- Door Width from 500mm.
- Compatible with 'ebco' aluminium shutter profiles Code Nos. :- GSP 4-55 & GSP 4-50.

Specifications


Item	Code Nos.	Door Thickness (Max.) mm	Finish
Hi Slide Overlay - Aluminium Profile Shutters (3 Shutters)	HSO APS 3	22	Zinc White
Hi Slide Overlay - Al. Profile Shutter for 3 Shutters (Soft Close) 80 Kgs.	HSO APS 3SC-80		
Al. Track (Top) - 2.44m	HSO - TT12	-	Anodized Silver
Al. Track (Top) - 3.66m	HSO - TT13	-	
Al. Track (Bottom) - 2.44m	HSO - BT12	-	
Al. Track (Bottom) - 3.66m	HSO - BT13	-	

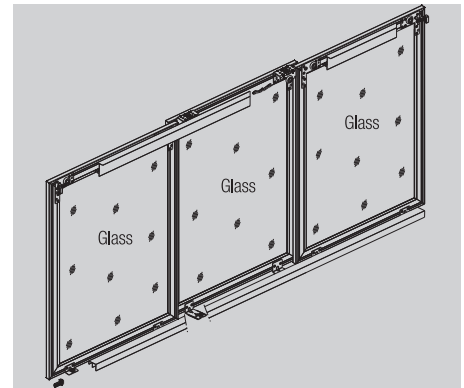


Fitting Instructions

1. Fit the Top Track to the top face of the cabinet as shown in Fig 2. (for dimensions refer Fig. 1.)
2. Fit the Top Track support behind the top track & to the inner side face of the cabinet as shown in Fig 2.
3. Fit the Bottom Track to the bottom face of the cabinet as shown in Fig 3. (for dimensions refer Fig. 1.)
4. Fit the Top Hanger Outer to the inner face of the Outer Shutter & Top Hanger Inner to the inner face of the Inner shutter as shown in Fig 1.
5. Fit the Bottom Guide Outer to the inner face of the Outer Shutter & Bottom Guide Inner to the inner face of the Inner shutter as shown in Fig 1.
6. HSO APS 3
- 6.1. Fit the Catch as shown in Fig. 4. with M4 screws & nuts provided.
- 6.2. Fit the Center Catch as shown in Fig 5. (Center Catch to be fitted in such a position that any one of the Top Hanger Outer comes & locks when the centre shutter is fully closed).
- 6.3. Hang the shutters to the top track & lock the shutters as shown in Fig.6.
- 6.4. Fit the Bottom Stoppers as shown in Fig 7.
7. HSO APS 3SC-80
- 7.1. Fit the Bottom Stoppers as shown in Fig 8.
- 7.2. Fit the Soft Close Assembly to the side shutters as shown in Fig. 9.
- 7.3. Hang the shutters to the top track & lock the shutters as shown in Fig.6.
- 7.4. Fit the Soft Close for Middle Shutter as shown in Fig 10.

For HSO APS 3

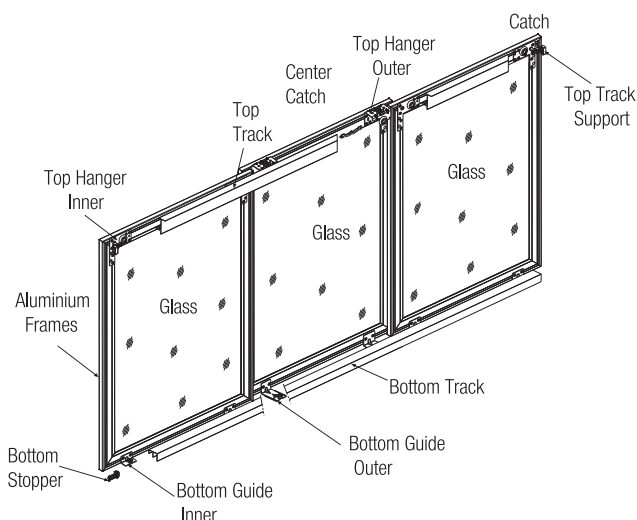

HSO APS 3SC-80

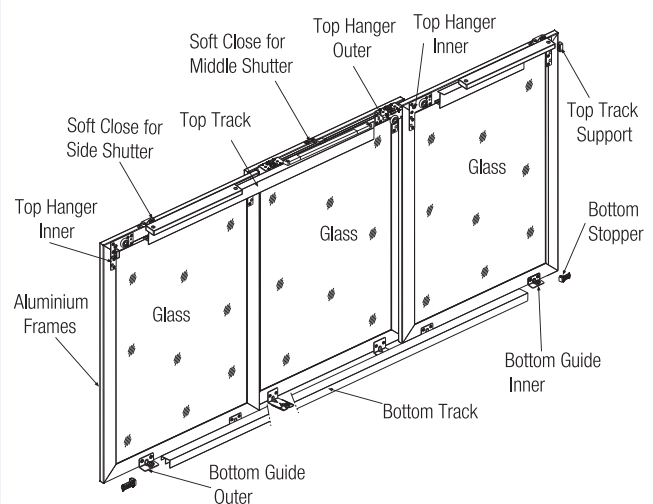



HI SLIDE OVERLAY - AL. PROFILE SHUTTER FOR 3 DOOR / 3 DOOR WITH SOFT CLOSE 80KGS

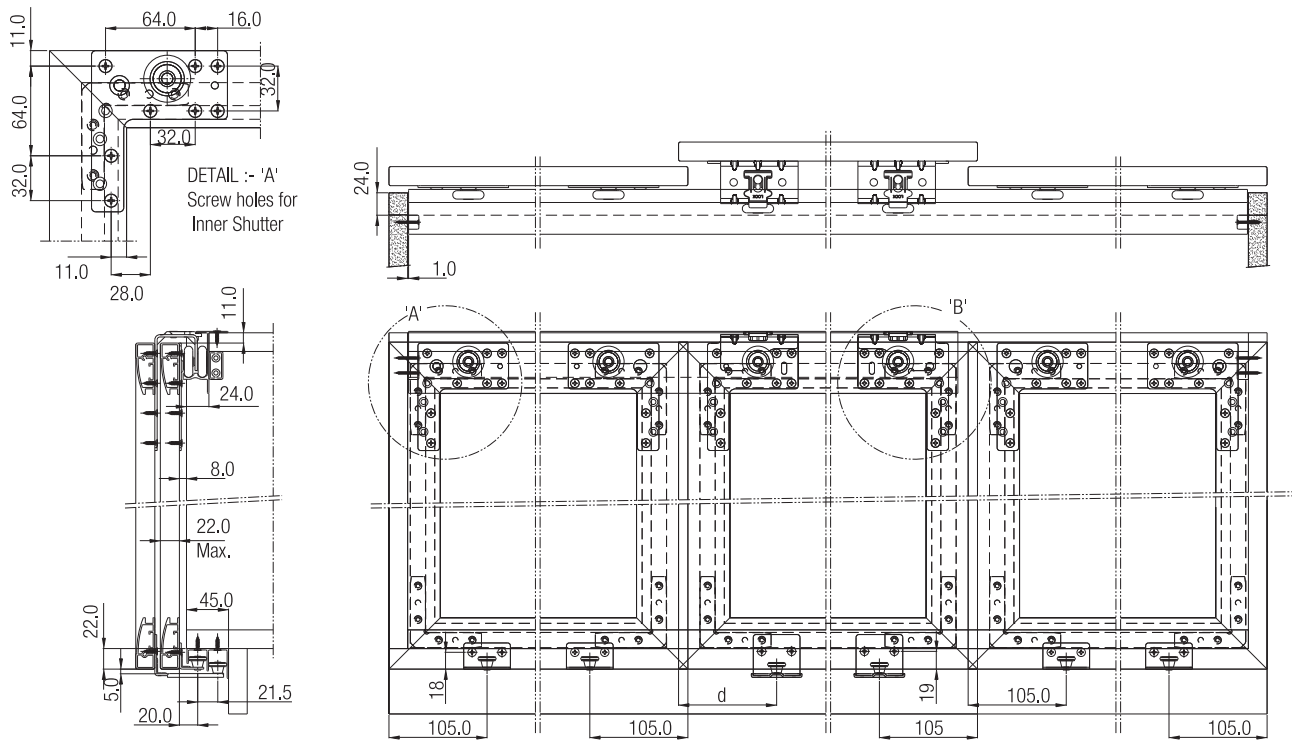


Fig. 1.

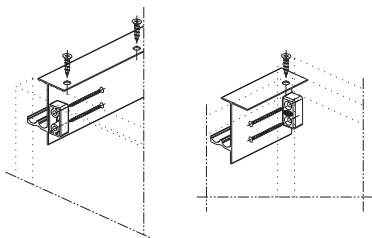


Fig. 2.




Fig. 3.

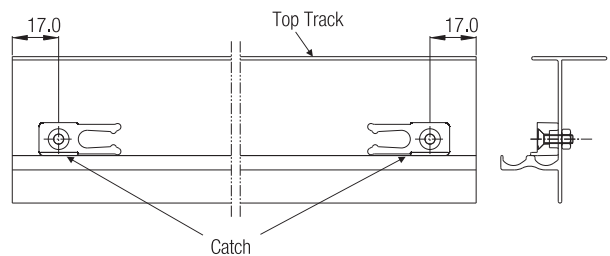


Fig. 4.

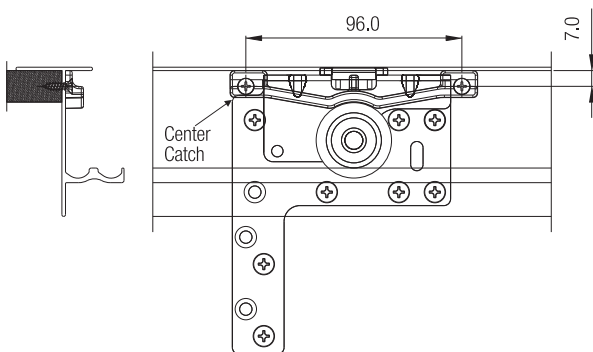


Fig. 5.

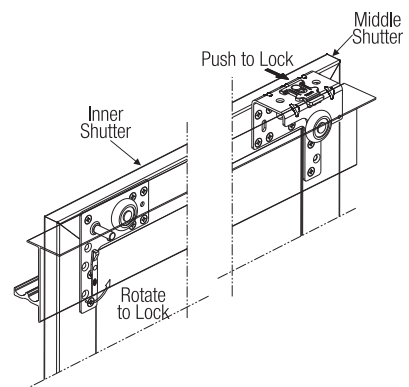


Fig. 6.



HI SLIDE OVERLAY - AL. PROFILE SHUTTER FOR 3 DOOR / 3 DOOR WITH SOFT CLOSE 80KGS



Fitting diagram of Bottom Stopper

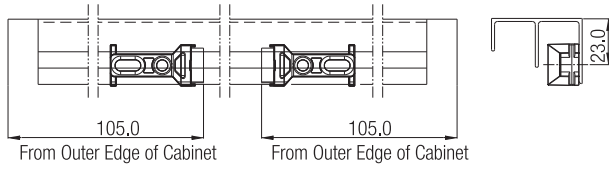


Fig. 7

Fitting diagram of Bottom Stopper

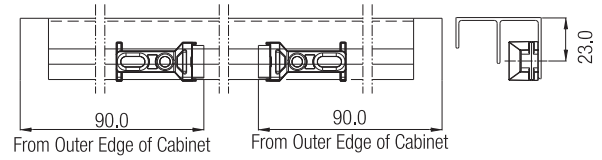


Fig. 8

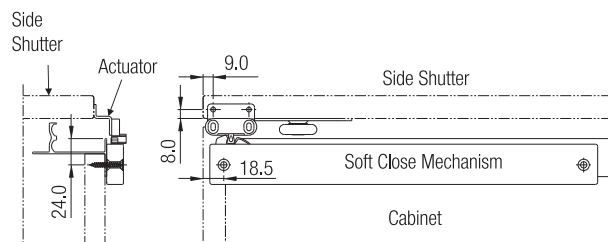


Fig. 9

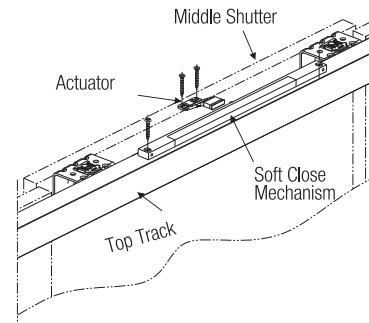


Fig. 10

HSO APS 3

1 No.	1 No.	1 No.	1 No.	1 No.	2 No's	4 No's	2 No's	1 No.	1 No.	2 No's	2 No's

HSO APS 3SC-80

1 No.	1 No.	2 Nos.	2 Nos.	2 Nos.	4 Nos.	2 Nos.	1 No.	1 No.	2 Nos.	2 Nos.	2 Nos.