

POZI RECESS CSK HEAD CHIPBOARD SCREW




Special Features

- Ideal furniture fastener, providing high pull out resistance.
- Can be reused.
- Manufactured to international specifications and standards.
- Choice of diameters and lengths ensure proper selection for application.

Specifications

Item	Code Nos.	Size in mm	Finish
Pozi Recess CSK Head Chipboard Screw - Hardened Zinc Plated/ Nickel Plated	CBS-3012	3 x 12 (5 x 12)	ZW
	CBS-3016	3 x 16 (5 x 16)	
	CBS-3016-NP	3 x 16 (5 x 16)	NP
	CBS-3020	3 X 20 (5 x 20)	ZW
	CBS-3512	3,5 x 12 (6 x 12)	
	CBS-3512-NP	3,5 x 12 (6 x 12)	NP
	CBS-3516	3,5 x 16 (6 x 16)	ZW
	CBS-3516-NP	3,5 x 16 (6 x 16)	NP
	CBS-3520	3,5 x 20 (6 x 20)	ZW
	CBS-3520-NP	3,5 x 20 (6 x 20)	NP
	CBS-3525	3,5 X 25 (6 x 25)	ZW
	CBS-3525-NP	3,5 X 25 (6 x 25)	NP
	CBS-3530	3,5 x 30 (6 x 30)	ZW
	CBS-3535	3,5 x 35 (6 x 35)	
	CBS-4016	4 X 16 (8 x 16)	
	CBS-4020	4 X 20 (8 x 20)	NP
	CBS-4020-NP	4 X 20 (8 x 20)	
	CBS-4025	4 X 25 (8 x 25)	ZW
	CBS-4025-NP	4 X 25 (8 x 25)	NP
	CBS-4030	4 X 30 (8 x 30)	ZW
	CBS-4030-NP	4 X 30 (8 x 30)	NP
	CBS-4035	4 x 35 (8 x 35)	ZW
	CBS-4035-NP	4 x 35 (8 x 35)	NP
	CBS-4040	4 X 40 (8 x 40)	ZW
	CBS-4040-NP	4 X 40 (8 x 40)	NP
	CBS-4045	4 x 45 (8 x 45)	ZW
	CBS-4050	4 x 50 (8 x 50)	
	CBS-4050-NP	4 x 50 (8 x 50)	NP
	CBS-5050	5 x 50 (10 x 50)	ZW
	CBS-5050-NP	5 x 50 (10 x 50)	NP
	CBS-6035	6 x 35 (14 x 35)	ZW
	CBS-6050	6 x 50 (14 x 50)	

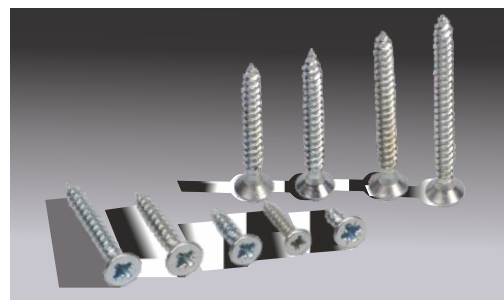

Pozi Drive		Recess No.		1	2	2	2	2	3
		m	Min.	3,00	4,00	4,40	4,80	5,30	6,60
		n	Min.	1,60	1,76	2,05	2,46	2,99	2,99
			Max.	2,01	2,06	2,51	2,92	3,45	3,45

Diameter		3	3,5	4	4,5	5	6
d1	Min.	2,80	3,30	3,75	4,25	4,70	5,70
	Max.	3,00	3,50	4,00	4,50	5,00	6,00
d2	Min.	1,50	1,75	2,02	2,22	2,52	3,22
	Max.	1,90	2,15	2,50	2,70	3,00	3,70
D	Min.	5,70	6,64	7,64	8,64	9,64	11,57
	Max.	6,00	7,00	8,00	9,00	10,00	12,00
p	±10%	1,35	1,60	1,80	2,00	2,20	2,60
a	Max.	1,60	1,80	2,00	2,20	2,50	3,00
b	Max.	1,90	2,10	2,50	2,70	3,00	3,60
r	Min.	1,20	1,50	1,60	1,80	2,00	2,00
	Max.	1,60	1,90	2,10	2,30	2,60	2,60

Breaking Torque	Min/Nm.	1,50	2,00	3,00	4,30	6,20	10,80
Bending Angle	Min.	15°	15°	15°	15°	15°	15°

Length	12	16	20	25	30	35	40	45	50	60	70
Tol. ±	0,90	0,90	1,05	1,05	1,05	1,25	1,25	1,25	1,25	1,50	1,50

Material	C-1022 Steel Heat treated Case Hardened
Surface Hardness	Min. 450 HV 0,3
Surface Finish	Zinc Plated with Blue Passivation

