



Special Features

- Smooth and silent roller system with “Auto Closing” feature.
- Right side pair has lateral guiding.
- Left side pair has side gap adjustment.
- Tilt and remove drawer.
- Stopper to prevent drawer from falling
- “System 32” compatible.
- Ribs provided for strength.
- Load capability - 20 kgs.



Specifications

Code Nos.	Length (mm)	Extension (mm)	Gap/Side (mm)	Max Load (kg)	Finish
SMDS 30	300	210	12.7 (1/2")	20	Powder Coated Black, Brown and Ivory
SMDS 35	350	260			
SMDS 40	400	310			
SMDS 45	450	360			
SMDS 50	500	410			
SMDS 60	600	510	15.6 (5/8")		
SMDS 75	750	660			

Fitting Instructions

1. Side gap of 12.7 mm (1/2") per side required (Refer Fig. 1).
2. Side gap of 15.6 mm (5/8") per side is required for 750 mm.
3. 25.4 mm (1") clearance from top edge of drawer required to tilt and remove drawer (Refer Fig. 2).
4. Fixed and Moving slide should be equally offset by 2 mm for Auto-Closing (Refer Fig. 2).
5. Recess screw heads to avoid interference.
6. A set of slides must be fitted parallel and at same heights to each other.


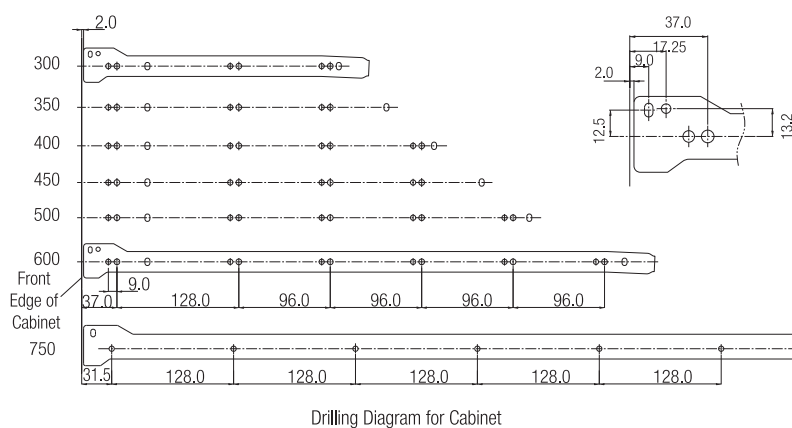


Fig. 1 FRONT VIEW


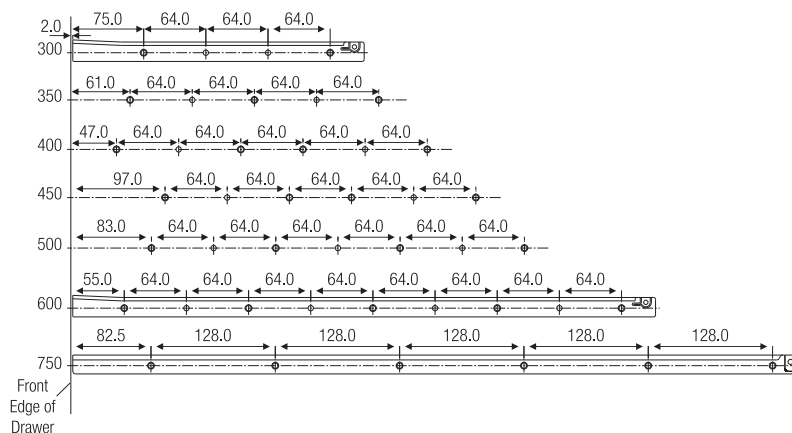


Fig. 2 SIDE VIEW

Caution

For efficiency and durability.

- Side gap of 12.7mm(1/2") and 15.6mm(5/8") per side is most important.
- Fix slides parallel and at equal height.
- Do not apply paint or polish.