



# SLEEK TELESCOPIC DRAWER SLIDE (I) 35 - SOFT CLOSE



## Special Features

- Precision telescopic slides.
- Built in soft closing function
- Easy for installation.
- Direct fitting from front.
- Removable drawer with Latch.
- System 32 installation.
- Load capacity: 35 kgs.

## Specifications

Code Nos.	Length (mm)	Extension (mm)	Gap / Side (mm)	Max. Load (Kgs.)	Finish
STDS 30 (I) 35-SC	300	285	12.7 to 13.0	35	Zinc Plated White
STDS 35 (I) 35-SC	350	348			
STDS 40 (I) 35-SC	400	398			
STDS 45 (I) 35-SC	450	447			
STDS 50 (I) 35-SC	500	500			
STDS 55 (I) 35-SC	550	550			
STDS 60 (I) 35-SC	600	600			



## Fitting Instructions

1. To install Sleek Telescopic Drawer Slide - Soft Close, 12.7 to 13.0 mm gap per side is required between cabinet and drawer (Refer Fig. 1).
2. Depress latch and remove the Inner slide (Refer Fig. 2).
3. Fit Outer (Fixed) slide on to the inside of the cabinet, access to holes can be got through slots in Intermediate slide.
4. Slides should be fitted parallel and screws tightened fully to avoid gaps.
5. Fit Inner slide on to the outside of the drawer.
6. Now slide the drawer with Inner slide fitted on to the Intermediate slides on the cabinet till the latch engages automatically.

## DRILLING DIAGRAM FOR CABINET

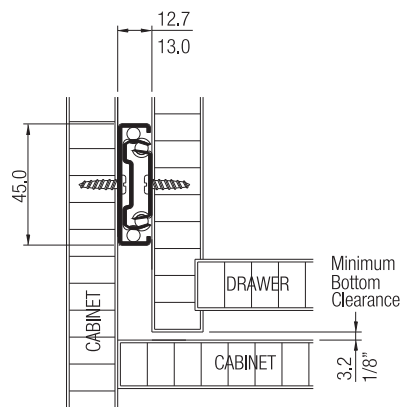
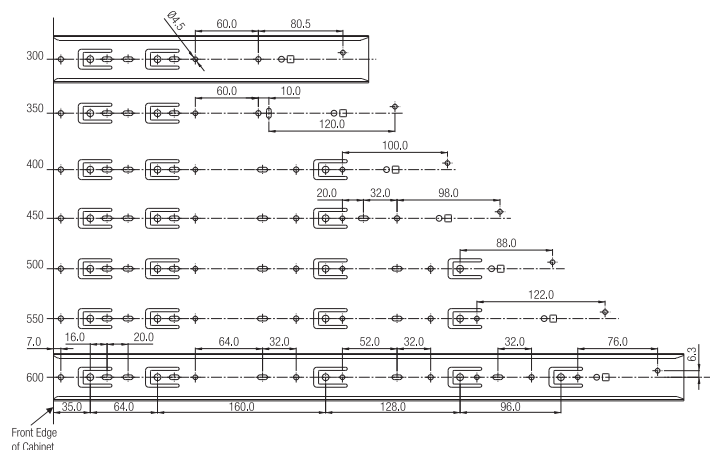


Fig. 1

## DRILLING DIAGRAM FOR DRAWER


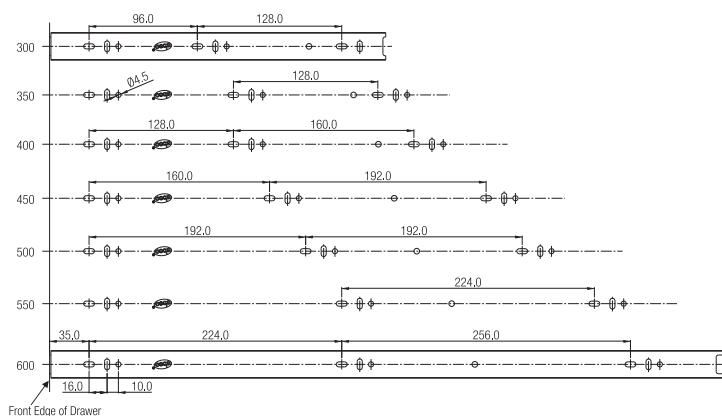


Fig. 2

## Caution

- For efficiency and durability.
- Strictly maintain 12.7 to 13.0 mm side gap.
  - Fit slides parallel and at equal heights.
  - Do not apply paint or polish.
  - Do not let saw dust enter into the slides.