



[Home](#) » [Products](#) » [Drawer Slides](#) » [Two Way Slides](#)



Two Way Slides

- Slim design requires only 10mm side gap.
- Can be used with bigger drawers as slides are reversible.
- No de-assembly required.
- "System 32" compatible.
- Precision Telescopic Slide for smooth movement.
- Load capacity - 12kgs.


Specifications

Model	Code	Length (mm)	Extension Loss (mm)	Drawer Length 'A' mm	Max.Load Kgs.	Gap/Side (mm)	Finish
Two Way Slide	TWDS 200-325	194	58.0	200-325	12	10	Zinc Plated White/Black.
	TWDS 300-485	290	88.0	300-485			
	TWDS 375-655	374	88.0	375-655			
	TWDS 420-710	418	118.0	420-710			


Fitting Instructions

1. 10mm side gap required per side. (Refer fig. 1)
2. Can be recessed fitted in a 27mm slot to reduce side gap. (Refer fig. 2)
3. Slide must be parallel and at equal height.

Drilling Diagram for Cabinet

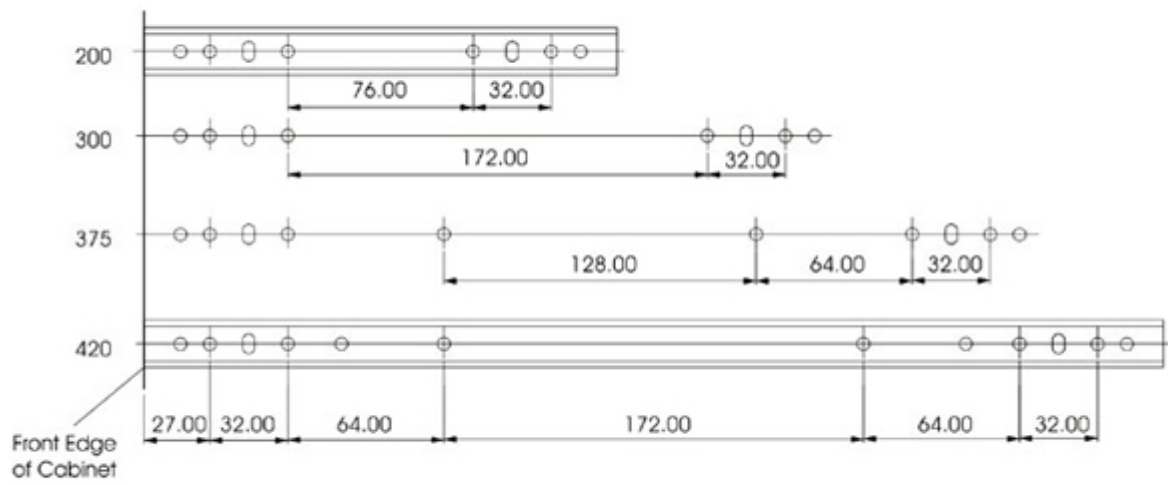

Drilling Diagram for Drawer

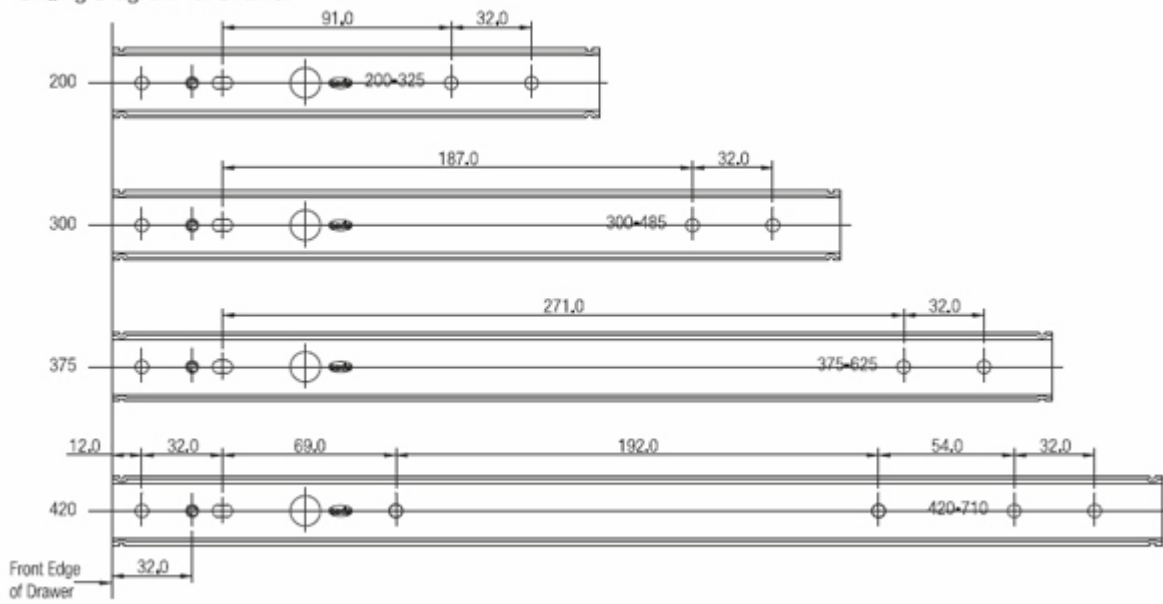

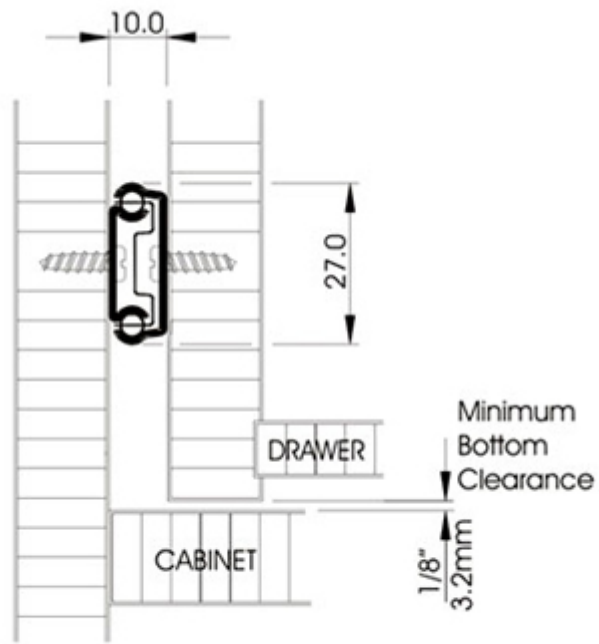


Fig.1

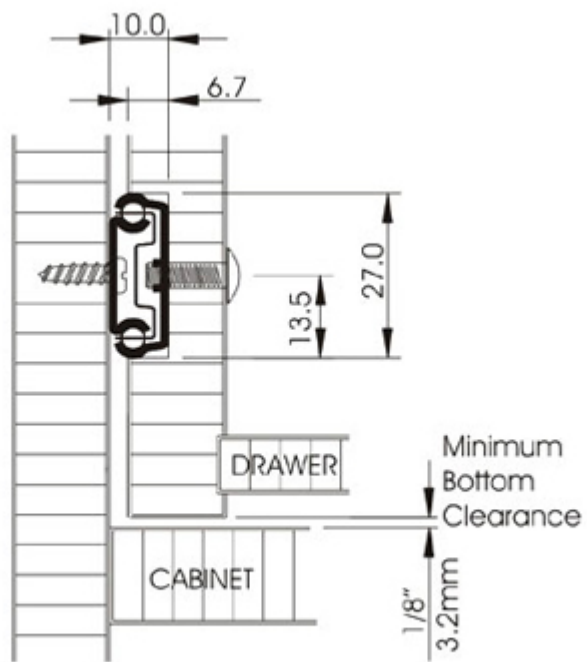


Fig.2

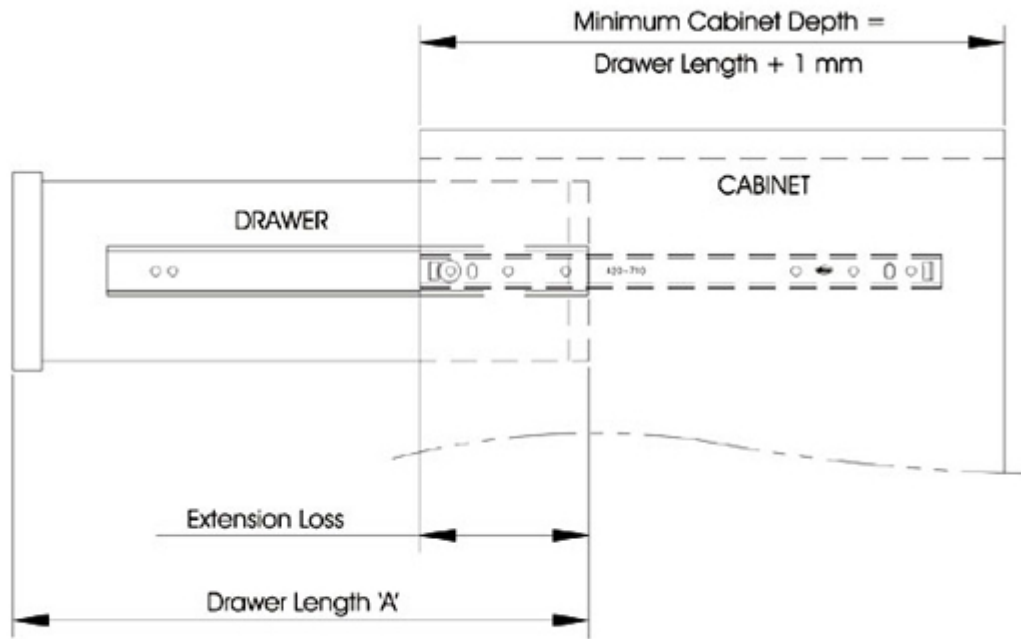


Fig.3

Caution

- Strictly maintain side gap given in the diagrams.
- Fit slides parallel and at equal heights.
- Do not apply paint or polish.
- Do not let saw dust enter into the slides.

Packing Chart

Model	Code	Inner Packing (Kgs.)		Outer Packing (Kgs.)	
		Qty	Weight	Qty	Weight
Two Way Slide	TWDS 200-325	20 Sets	4.97	100 Sets	25.5
	TWDS 300-485	25 Sets	9.25	100 Sets	37.7
	TWDS 375-655	25 Sets	11.55	100 Sets	47
	TWDS 420-710	25 Sets	13.5	100 Sets	54.7